




Kyla

Energizing Green Living



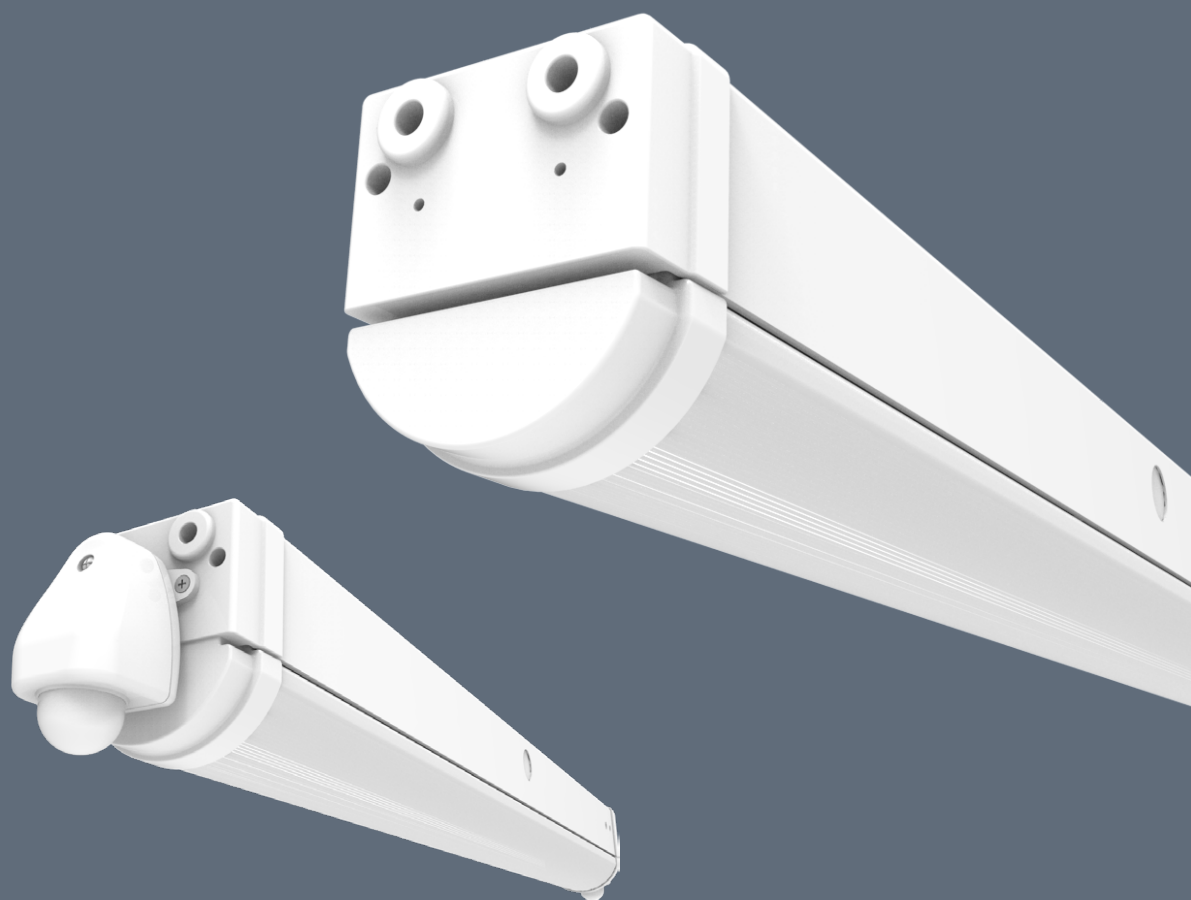

Batten Fitting Series

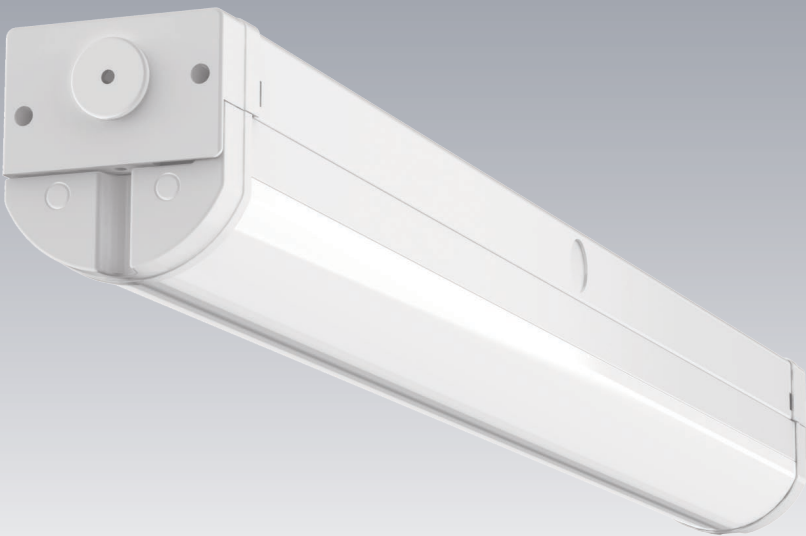

Leya LF

2ft
White

Key Features

IP65

50,000 Hrs

PF ≥ 0.9

CRI > 80


CE

RoHS COMPLIANT


Surface Mounted

Colour Temperature

Warm
White
3000K

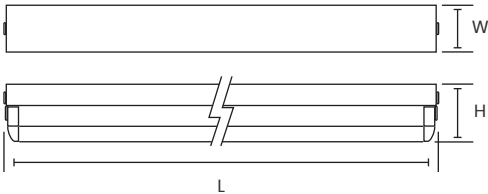


Code	Power	Lumen	Size (L x W x H)
LF212	7W	700 lm	601 x 60 x 78mm

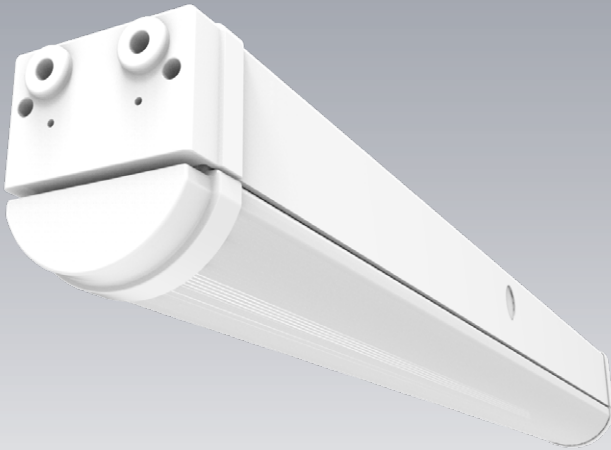

Leya LFE

2ft, 4ft
White

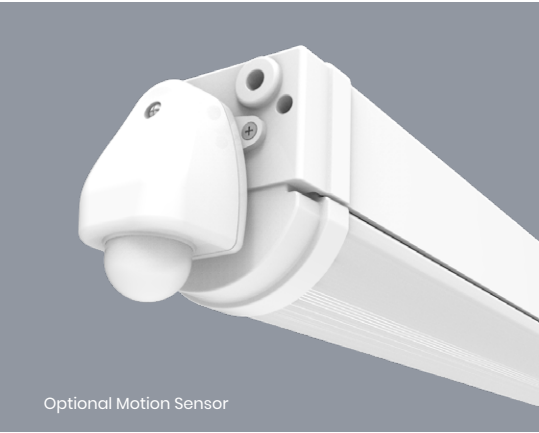

Optional Motion Sensor

Key Features

IP54

50,000 Hrs

PF ≥ 0.9

CRI > 80

Dimmable

CE

RoHS COMPLIANT

Surface Mounted

Optional

Motion Sensor


Battery

Colour Temperature


Warm White 3000K

Cool White 4000K

Daylight 6500K

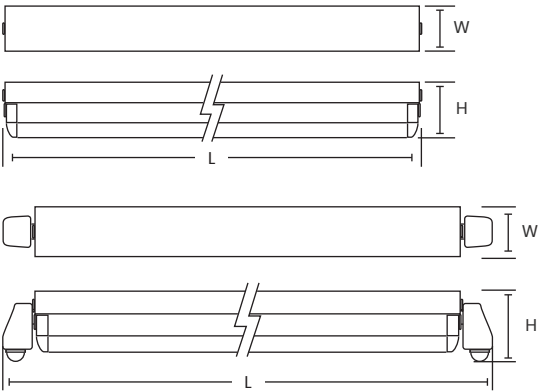

Code	Power	Lumen	Size (L x W x H)
LFE207 G2	7W	850 lm	670 x 70 x 81mm
LFE414 G2	14W	1700 lm	1224 x 70 x 81mm
LFE213H G2	13W	1500 lm	670 x 70 x 81mm
LFE426H G2	26W	3000 lm	1224 x 70 x 81mm

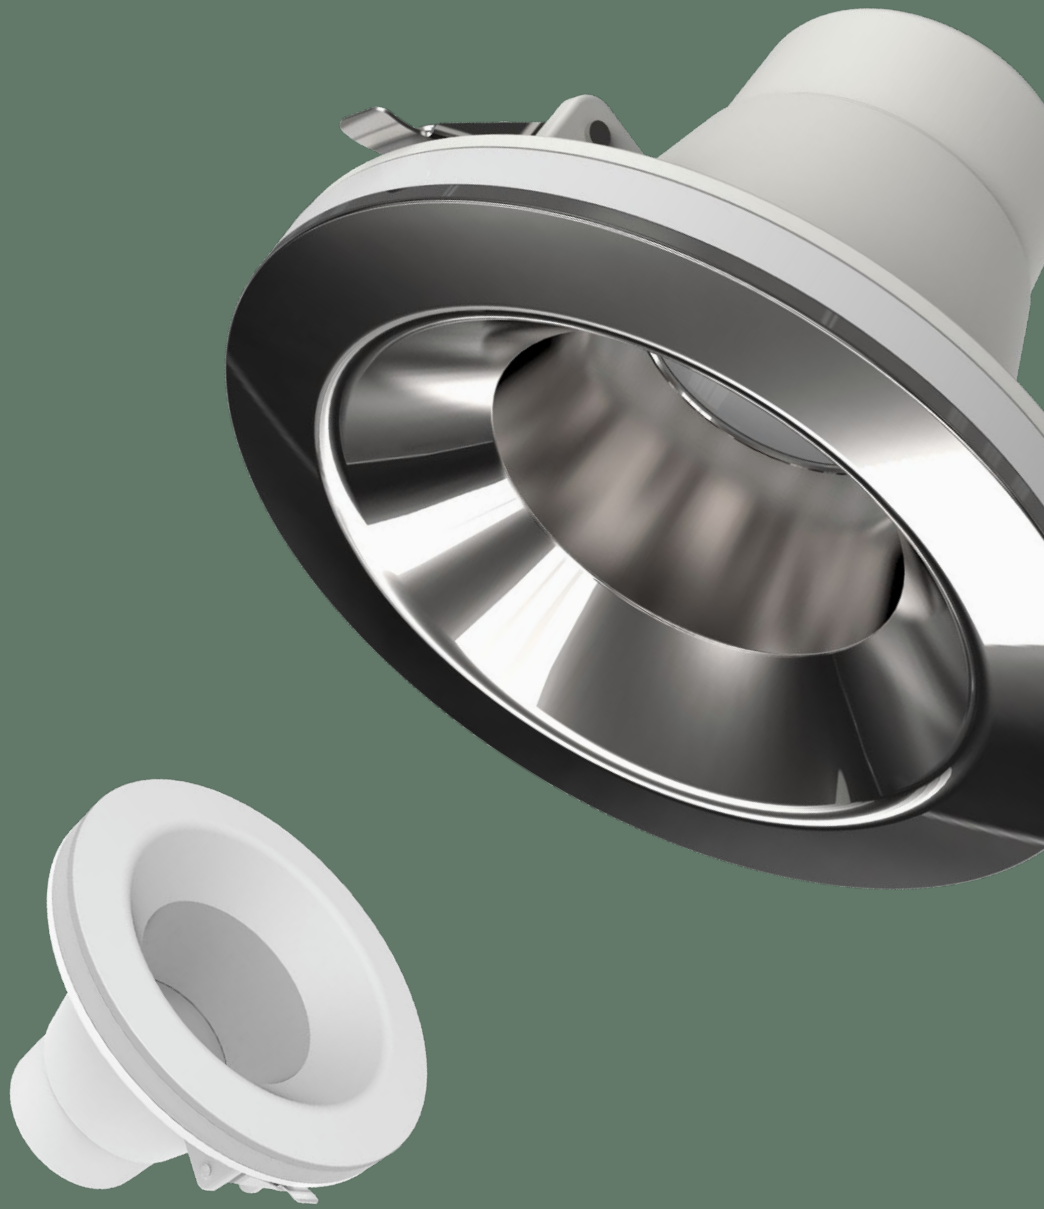

Downlight Series

Drexon LDR410

3.5"
Black and white face ring
Dimmable Downlight



Key Features






Optional



Colour Temperature

Warm
White
3000K

Code	Power	Lumen	Size (D x H)
LDR410	10W	800 lm	85mm X 85mm

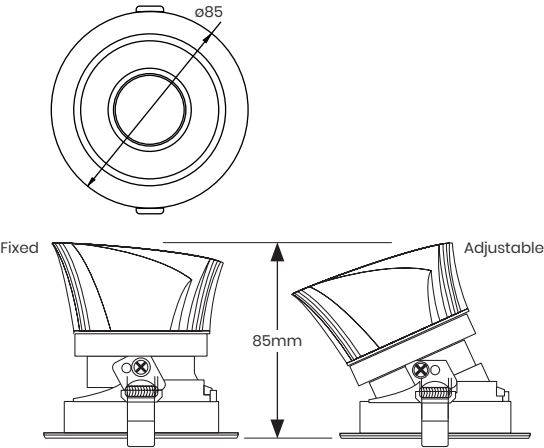



Drexon LDR3H12

3.5"
White
Dimmable Downlight

Key Features

IP44

35,000 Hrs

PF ≥ 0.9

CRI > 80

Dimmable

100°-112°

CE

RoHS COMPLIANT


Recessed

Colour Temperature

Warm White 3000K

Cool White 4000K

Daylight 6500K

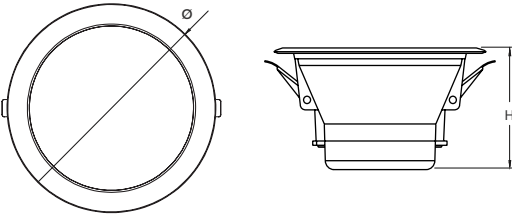

Code	Power	Lumen	Size (D x H)
LDR3H12	9W	850 lm	110mm X 65mm



Drexon LDR412

4"
White
Dimmable Downlight



LDR412A

Key Features

IP44

35,000 Hrs

PF ≥ 0.9

CRI > 80

Dimmable

100°-112°

CE

RoHS COMPLIANT

Recessed


Colour Temperature

Warm White 3000K

Cool White 4000K

Daylight 6500K

Code	Power	Lumen	Size (D x H)
LDR412	6W	850 lm	123mm X 69mm
LDR412A	11W	750 lm	139mm X 103mm

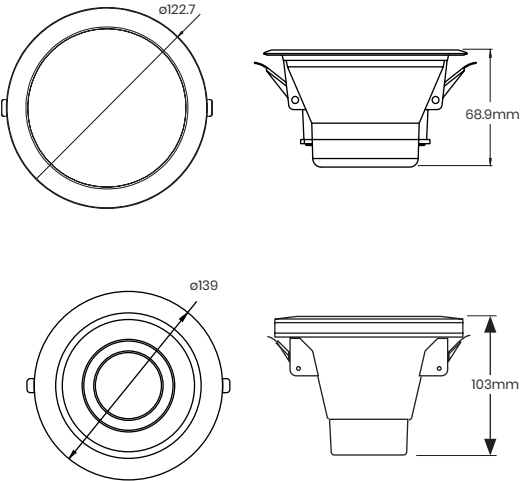



Drexon LDR607

6"
White
Dimmable Downlight

Key Features






Optional




Colour Temperature



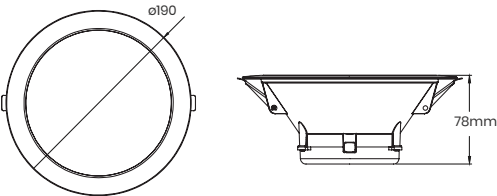

Code	Power	Lumen	Size (D x H)
LDR607E	7W	700 lm	190mm X 78mm
LDR612E G2	6W	800 lm	190mm X 78mm

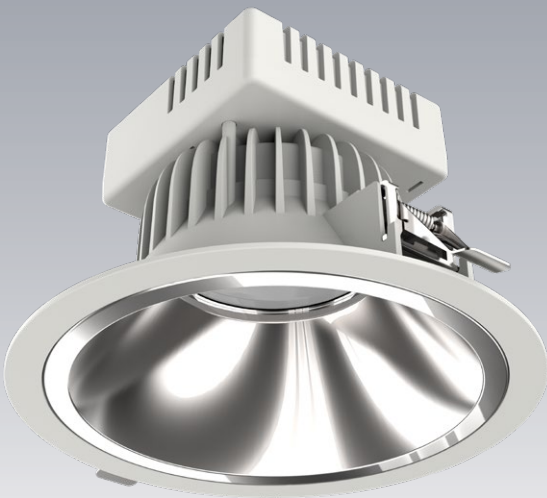

Dralora LDRA-LG-D

6", 8"
White with chrome plated
Dimmable Low Glare Downlight



LDRA-LG-D 6in

Key Features

IP44

35,000 Hrs

PF ≥ 0.9

CRI > 80

Dimmable

100°-112°

CE

RoHS COMPLIANT

Recessed


Colour Temperature

Warm White 3000K

Cool White 4000K

Daylight 6500K

Code	Power	Lumen	Size (D x H)
LDRA616-LG-D	16W	1400 lm, 1600 lm, 1600 lm	194mm X 125mm
LDRA624-LG-D	24W	2100 lm, 2300 lm, 2300 lm	194mm X 125mm
LDRA630-LG-D	30W	2800 lm, 3000 lm, 3000 lm	194mm X 125mm

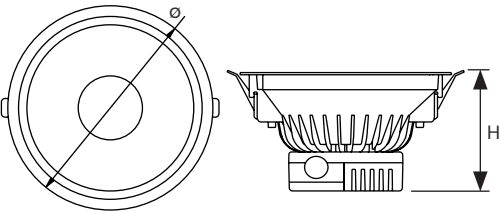



Dralora LDRA

6", 8"
White



Key Features

IP44

35,000 Hrs

PF ≥ 0.9

CRI > 85

100°-112°

RoHS COMPLIANT


Recessed

Colour Temperature

Warm White 3000K

Cool White 4000K

Daylight 6500K

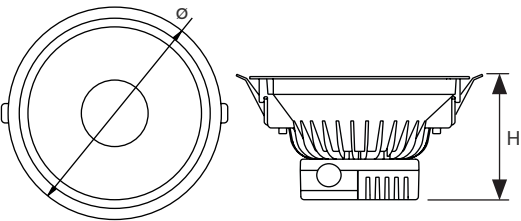

Code	Power	Lumen	Size (D x H)
LDRA616	16W	1400 lm, 1600 lm, 1600 lm	184mm X 110mm
LDRA624	24W	2100 lm, 2300 lm, 2300 lm	184mm X 110mm
LDRA630	30W	2800 lm, 3000 lm, 3000 lm	184mm X 110mm
LDRA824	24W	2100 lm, 2300 lm, 2300 lm	240mm X 91mm
LDRA830	30W	2800 lm, 3000 lm, 3000 lm	240mm X 91mm



Cyclone

3.5", 5", 6", 7", 8", 10"
White



Key Features

IP20

IK07

CRI 80

PF ≥ 0.9

90°

3000K
3000K
4000K
6000K
AVAILABLE

CE

CB

RoHS

ErP

Recessed

Optional

IP64

DIP SWITCH 3 IN 1

Triac

0-10V

DALI

Emergency

Microwave

Wi-Fi

Bluetooth

ZigBee

tuya


Colour Temperature

Warm White
3000K

Cool White
4000K

Daylight
6000K


Code	Power	Lumen	Size (A x B)	Cut-out (D x H)
D5090-C	10W	950 lm	113 X 57mm	90 X 98mm
D5130-C	14W	1330 lm	143 X 61mm	117 X 127mm
D5150-C	18W	1710 lm	165 X 65mm	135 X 145mm
D5180-C	20W	2000 lm	200 X 68mm	168 X 178mm
D5205-C	30W	3000 lm	230 X 75mm	192 X 210mm
D5250-C	40W	4000 lm	279 X 94mm	240 X 255mm

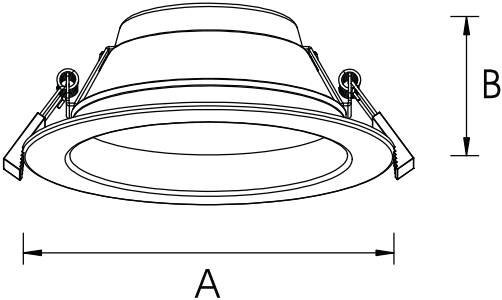



Cyclone Slim

3.5", 5", 6", 7", 8", 10"
White

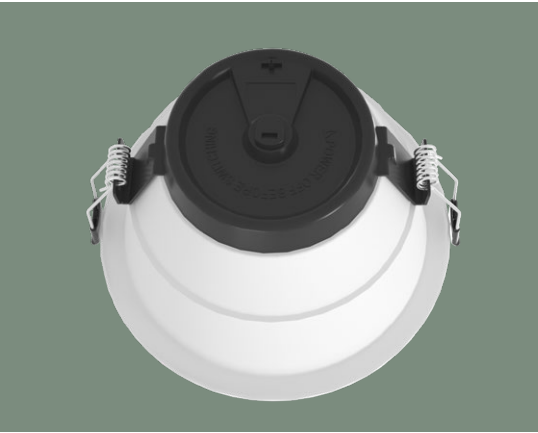

Key Features

IP20

IK07

CRI 80

PF ≥ 0.9

90°

3000K
4000K
6000K
AVAILABLE

CE

CB

RoHS

ErP

Recessed

Optional

IP64

DIP SWITCH 3 IN 1

Triac

0-10V

DALI

Emergency

Microwave

Wi-Fi

Bluetooth

ZigBee


tuya

Colour Temperature


Warm White
3000K

Cool White
4000K

Daylight
6000K

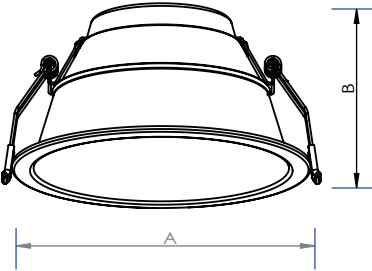

Code	Power	Lumen	Size (A x B)	Cut-out (D x H)
D5090-CS	10W	900 lm	108 X 71mm	92 X 98mm
D5130-CS	14W	1260 lm	140 X 77mm	120 X 130mm
D5150-CS	18W	1620 lm	167 X 87mm	145 X 150mm
D5180-CS	20W	1800 lm	192 X 97mm	170 X 180mm
D5205-CS	30W	2700 lm	220 X 113mm	195 X 205mm
D5250-CS	40W	3600 lm	271 X 127mm	240 X 255mm

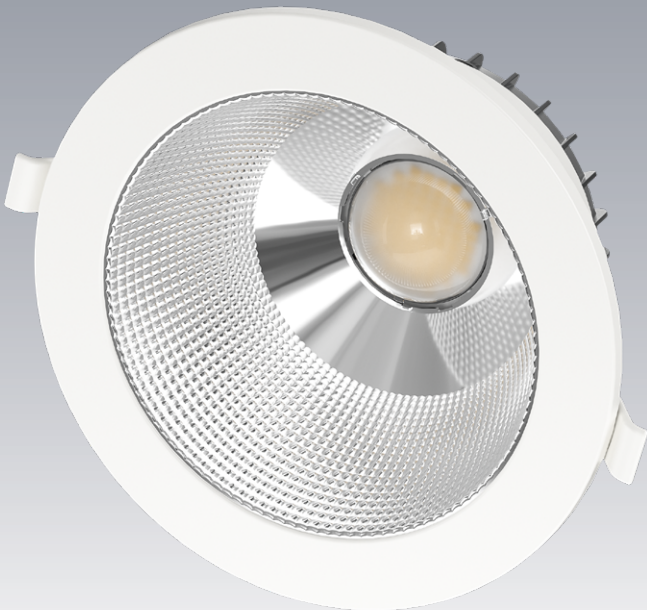

Explorer A

4", 6", 7", 8", 10"
White
Reflector+Lens version (UGR<19)

Ring options: Round/Square/Glass module



Key Features

IP64

IK06

CRI 80

PF ≥ 0.9

60°

DIP SWITCH 3 IN 1

CE

CB

RoHS

ErP

Recessed

Optional

40°

Triac

0-10V

DALI

Emergency

Microwave

Wi-Fi

Bluetooth

ZigBee


tuya

Colour Temperature

Warm White 3000K

Cool White 4000K

Daylight 5700K

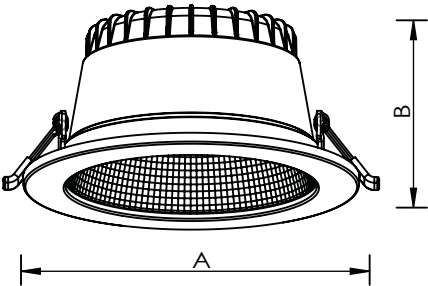


Code	Power	Lumen	Size (A x B)	Cut-out (D x H)
D15100-A	10W	950 lm	114 X 66mm	90 X 102mm
D15150-A	20W	1900 lm	174 X 87mm	145 X 155mm
D15180-A	28W	2660 lm	200 X 97mm	165 X 180mm
D15205-A-2	28W	2660 lm	232 X 110mm	195 X 210mm
D15205-A	35W	3325 lm	232 X 110mm	195 X 210mm
D15250-A-2	40W	3800 lm	280 X 130mm	240 X 255mm
D15250-A	50W	4750 lm	280 X 130mm	240 X 255mm

Explorer^B

4", 6", 7", 8", 10"
White
Reflector+Lens version (UGR<24)



Ring options: Round/Square/Glass module

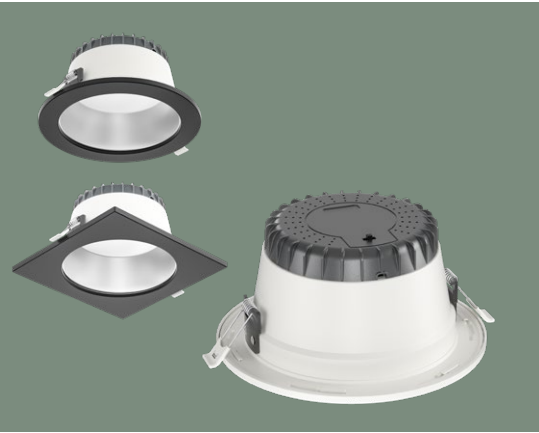

Key Features

IP64

IK06

CRI 80

PF ≥ 0.9

80°

DIP SWITCH 3 IN 1

CE

CB

RoHS

ErP

Recessed

Optional

Triac

0-10V

DALI

Emergency

Microwave

Wi-Fi

Bluetooth

ZigBee


tuya

Colour Temperature

Warm White 3000K

Cool White 4000K

Daylight 5700K

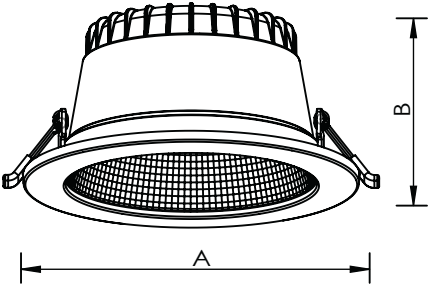


Code	Power	Lumen	Size (A x B)	Cut-out (D x H)
D15100-B	10W	1100 lm	114 X 66mm	90 X 102mm
D15150-B	20W	2400 lm	174 X 87mm	145 X 155mm
D15180-B	28W	3220 lm	200 X 97mm	165 X 180mm
D15205-B-2	28W	3220 lm	232 X 110mm	195 X 210mm
D15205-B	35W	4025 lm	232 X 110mm	195 X 210mm
D15250-B-2	40W	4600 lm	280 X 130mm	240 X 255mm
D15250-B	50W	5500 lm	280 X 130mm	240 X 255mm

Explorer Youth A

White
Reflector+Lens version (UGR<19)

Ring options: Round/Square/Glass module

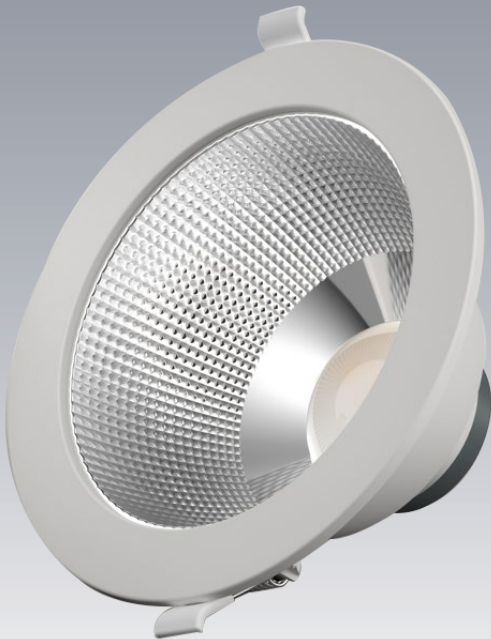

Key Features

IP64

IK07

CRI 80

UGR<19

PF≥ 0.9

40°

3000K
4000K
6000K
AVAILABLE

CE

CB

RoHS

ErP

Recessed

Optional

40°

Triac

0-10V

DALI

Emergency

Microwave

Wi-Fi

Bluetooth

ZigBee


tuya

Colour Temperature


Warm White
3000K

Cool White
4000K

Daylight
5700K

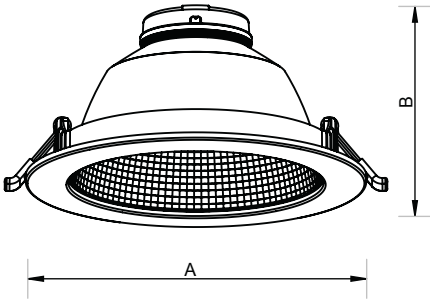

Code	Power	Lumen	Size (A x B)	Cut-out (D x H)
D16100-A	10W	950 lm	114 X 66mm	90 X 102mm
D16150-A	20W	1900 lm	174 X 87mm	145 X 155mm
D16205-A-2	28W	2660 lm	232 X 110mm	195 X 210mm
D16205-A	35W	3325 lm	232 X 110mm	195 X 210mm

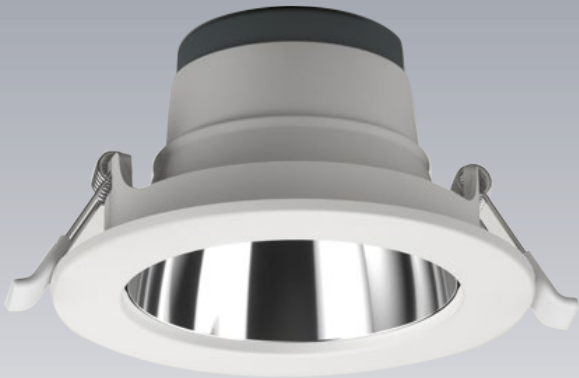

Explorer Youth B

4", 6", 7", 8", 10"
White
Reflector+Lens version (UGR<19)

Ring options: Round/Square/Glass module



Key Features

IP64

IK07

CRI 80

UGR<19

PF≥ 0.9

40°

3000K
4000K
6000K
AVAILABLE

CE

CB

RoHS

ErP

Recessed

Optional

40°

Triac

0-10V

DALI

Emergency

Microwave

Wi-Fi

Bluetooth

ZigBee


tuya

Colour Temperature

Warm White
3000K

Cool White
4000K

Daylight
5700K

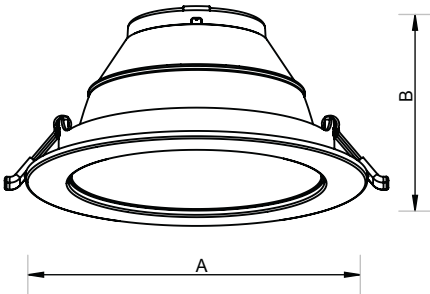

Code	Power	Lumen	Size (A x B)	Cut-out (D x H)
D16100-B	10W	1100 lm	ø114 X 66mm	ø90 X 102mm
D16150-B	20W	2400 lm	ø174 X 87mm	ø145 X 155mm
D16205-B-2	28W	3220 lm	ø232 X 110mm	ø195 X 210mm
D16205-B	35W	4025 lm	ø232 X 110mm	ø195 X 210mm



Legend

3", 4", 5", 6", 8"
White



Key Features

IP20

IK06

CRI 80

UGR<19

40°
D2070-C

60°

3000K
4000K
6000K
AVAILABLE

CE

CB

RoHS

ErP

Recessed

Optional

IP64

DIP
SWITCH
3 IN 1

Triac

0-10V

DALI

Emergency

Microwave

Wi-Fi

Bluetooth

ZigBee


tuya

Colour Temperature

Warm
White
3000K

Cool
White
4000K

Daylight
5700K

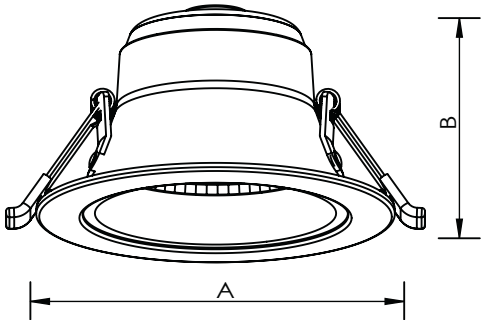

Code	Power	Lumen	Size (A x B)	Cut-out (D x H)
D2070-C	6W	600 lm	95 X 57mm	68 X 80mm
D2100-C	10W	1000 lm	113 X 68.5mm	90 X 102mm
D2130-C	15W	1500 lm	145 X 81.8mm	120 X 130mm
D2150-C	20W	2000 lm	174 X 88.8mm	145 X 155mm
D2205-C-2	28W	2800 lm	232 X 112.8mm	195 X 210mm
D2205-C	35W	3500 lm	232 X 112.8mm	195 X 210mm



Legend Slim

4", 5", 6", 7", 8"
White



Key Features

PF ≥ 0.9

IP20

IK06

CRI 80

UGR <19

60°

3000K
4000K
5000K
6000K
AVAILABLE

CE

CB

RoHS

ErP

Recessed

Optional

IP64

DIP SWITCH 3 IN 1

Triac

0-10V

DALI

Emergency

Microwave

Wi-Fi

Bluetooth

ZigBee


tuya

Colour Temperature


Warm White
3000K

Cool White
4000K

Daylight
5700K

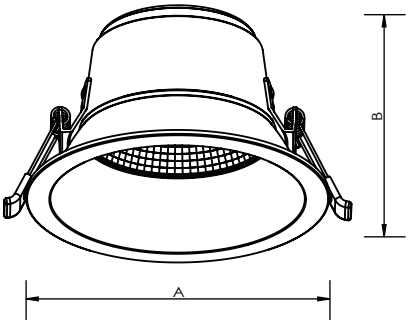

Code	Power	Lumen	Size (A x B)	Cut-out (D x H)
D2100-E	10W	1000 lm	108 X 76mm	90 X 98mm
D2130-E	14W	1400 lm	140 X 90mm	120 X 130mm
D2150-E	20W	2000 lm	167 X 103mm	145 X 155mm
D2180-E	28W	2800 lm	192 X 112mm	170 X 180mm
D2205-E-2	28W	2800 lm	220 X 121mm	195 X 210mm
D2205-E	35W	3500 lm	220X 121mm	195 X 210mm

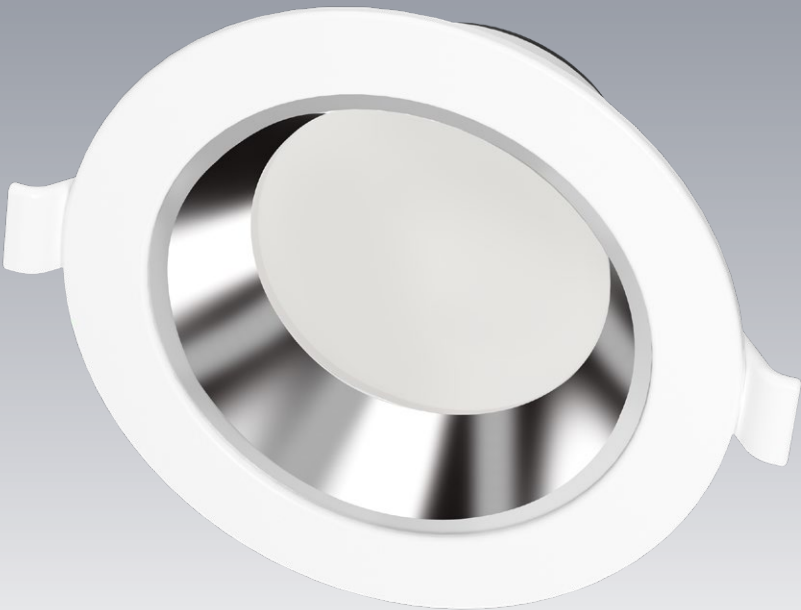

Phoenix

3", 4", 5", 6", 8"
White



Key Features

IP64

IK06

CRI 80

80°

DIP SWITCH 3 IN 1

CE

CB

RoHS

ErP

Accessed

Optional

Triac

0-10V

DALI

Emergency

Microwave

Wi-Fi

Bluetooth

ZigBee


tuya

Colour Temperature

Warm White 3000K

Cool White 4000K

Daylight 5700K

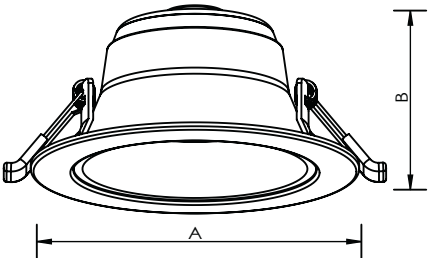

Code	Power	Lumen	Size (A x B)	Cut-out (D x H)
D2070-D	6W	630 lm	95 X 51.8mm	68 X 80mm
D2100-D	10W	1100 lm	113 X 58.8mm	90 X 102mm
D2130-D	15W	1650 lm	145 X 66.3mm	120 X 130mm
D2150-D	20W	2500 lm	174 X 71.7mm	145 X 155mm
D2205-D-2	28W	3500 lm	232 X 82.7mm	195 X 210mm
D2205-D	35W	4200 lm	232 X 82.7mm	195 X 210mm



Phoenix Slim

4", 5", 6", 7", 8"
White



Key Features

PF≥0.9

IP64

IK06

CRI 80

80°

DIP SWITCH 3 IN 1

CE

CB

RoHS

ErP

Recessed

Optional

Triac

0-10V

DALI

Emergency

Microwave

Wi-Fi

Bluetooth

ZigBee


tuya

Colour Temperature


Warm White 3000K

Cool White 4000K

Daylight 5700K

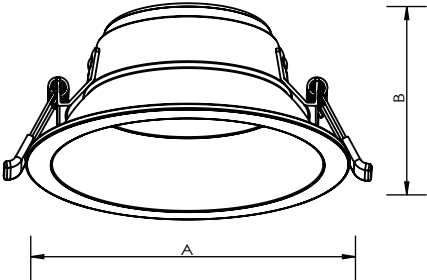


Code	Power	Lumen	Size (A x B)	Cut-out (D x H)
D2100-F	10W	1100 lm	108 X 59mm	90 X 98mm
D2130-F	14W	1540 lm	140 X 69mm	120 X 130mm
D2150-F	20W	2500 lm	167 X 76mm	145 X 155mm
D2180-F	28W	2500 lm	192 X 83mm	170 X 180mm
D2205-F-2	28W	3500 lm	220 X 91mm	195 X 210mm
D2205-F	35W	4375 lm	220 X 91mm	195 X 210mm

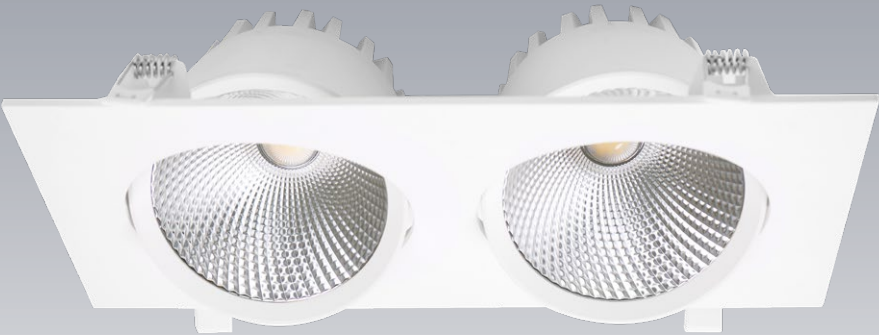

Sparkle

White , Black
Single head.double heads.triple heads for option

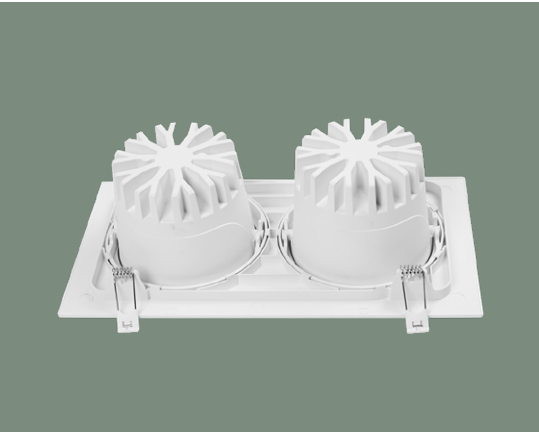

Key Features

IP20

PF≥0.9

CRI 80

UGR<19

LED SDCM<3

24°

40°

350°

30°

3000K
4000K
5000K
AVAILABLE

CE

CB

RoHS

ErP

recessed

Optional

Triac

0-10V

DALI

Emergency

Microwave

Wi-Fi

Bluetooth

ZigBee

tuya


Colour Temperature

Warm White
3000K

Cool White
4000K

Daylight
5700K

Code	Power	Lumen	Size (A x B)	Cut-out (D x H)
D13150-A	20W	2150 lm	180 X 180 X 96mm	155 X 155mm
D13150-B	40W	4350 lm	340 X 180 x 96mm	120 X 310mm
D13150-C	60W	6500 lm	490 X 180 X 96mm	155 X 465mm
D13150-D	20W	2150 lm	180 X 97mm	155 X 165mm

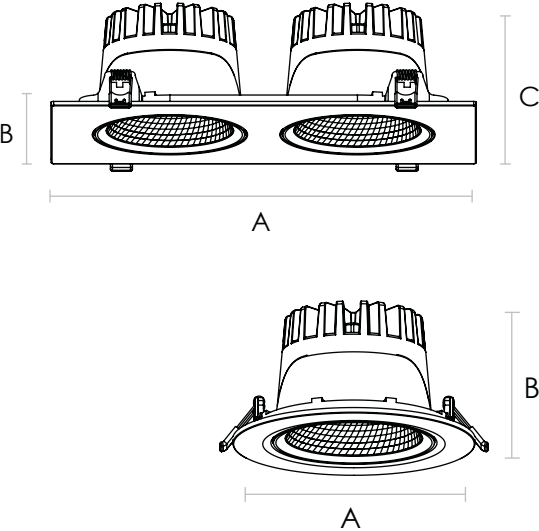



Posture

4", 6"
White



Key Features

IP20

CRI 80

IK03

110°

DIP SWITCH 3 IN 1

CE

CB

RoHS

ErP

Recessed

Optional

Triac

Wi-Fi

Bluetooth

ZigBee


tuya

Colour Temperature


Warm White 3000K

Cool White 4000K

Daylight 6000K

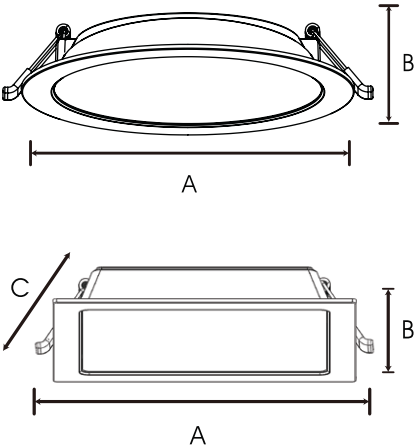

Code	Power	Lumen	Size (A x B)	Cut-out (D x H)
D8100-A	6W	498 lm	113 X 38mm	90 X 100mm
D8150-A	12W	984 lm	174 X 39mm	145 X 155mm
D8205-A	18W	1476 lm	244 X 39mm	198 X 210mm
D8225-A	20W	1740 lm	265 X 41mm	215 X 230mm
D8212-A	6W	498 lm	120 X 120 x 38mm	105 X 105mm
D8717-A	12W	1044 lm	170 X 170 X 39mm	155 X 155mm
D8222-A	18W	1476 lm	220 X 220 X 46mm	205 X 205mm

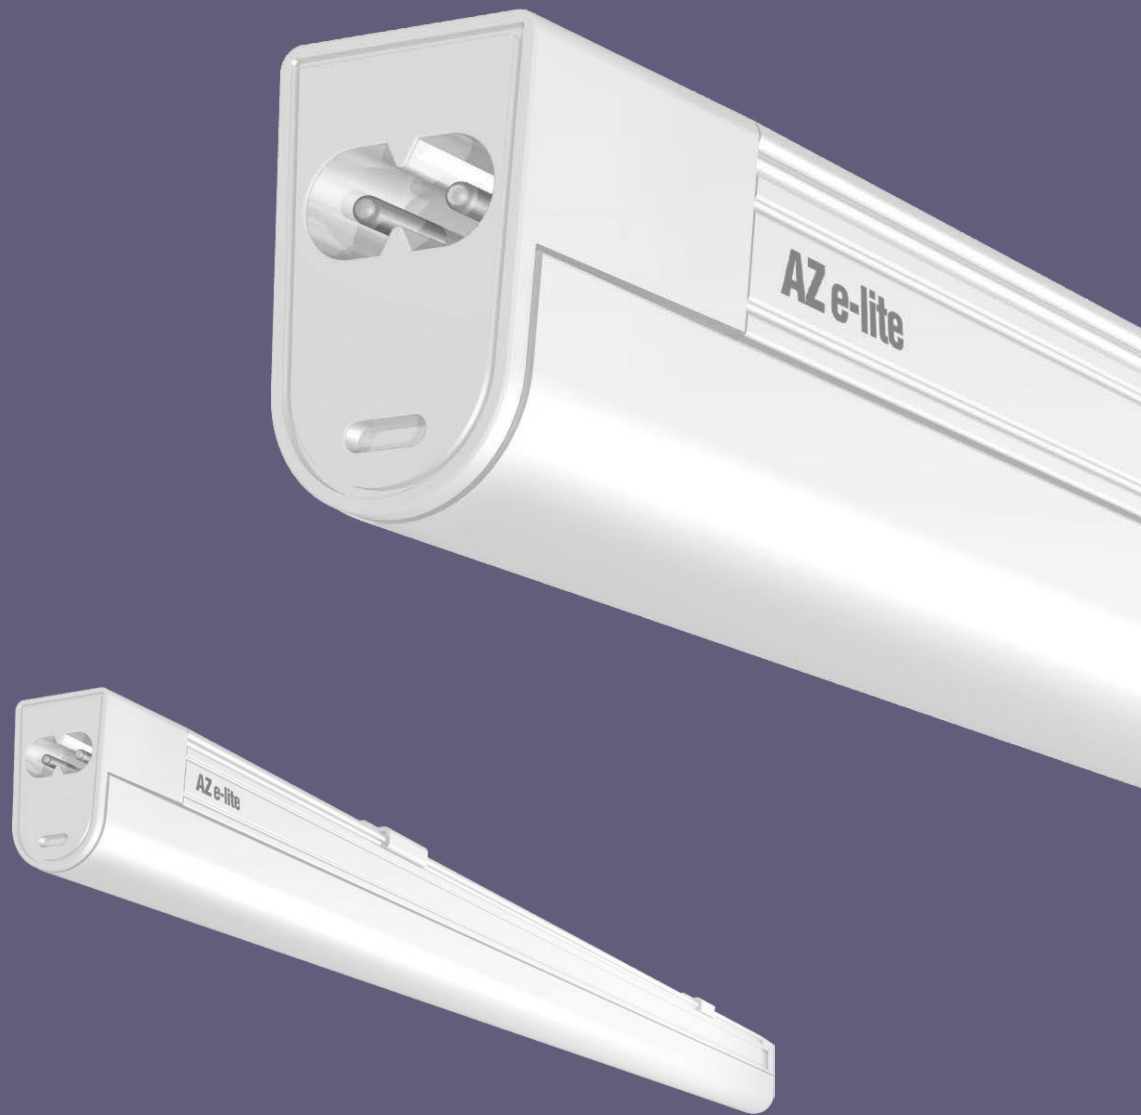

Cove Lighting Series



Lucera LFC2/LFC3

1ft, 2ft, 3ft, 4ft
White
T5 fitting

Key Features



IP20



35,000
Hrs



PF ≥ 0.9



CRI > 70



C8 Plug



CE



RoHS
COMPLIANT



Surface
Mounted

Colour Temperature




Warm
White
3000K



Cool
White
4000K




Daylight
6500K

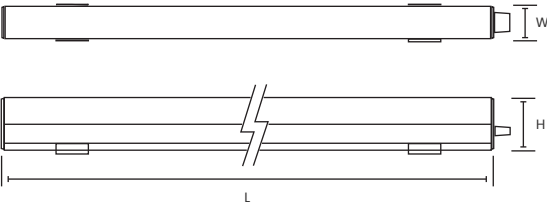

Code	Power	Lumen	Size (L x W x H)
LFC2-104	4W	350 lm	300 x 25 x 39mm
LFC2-208	8W	700 lm	600 x 25 x 39mm
LFC2-312	12W	1050 lm	900 x 25 x 39mm
LFC2-416	16W	1400 lm	1200 x 25 x 39mm



Panel Light Series

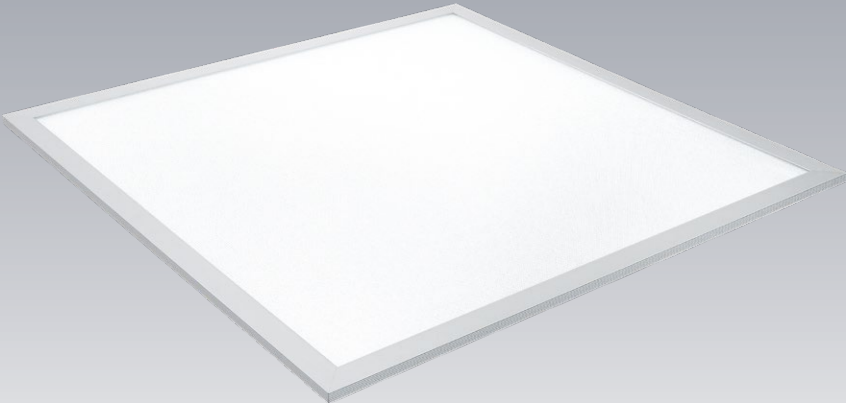

Pixel LPLS

2ft x 2ft
White



Key Features

IP20

50,000 Hrs

PF > 0.9

CRI > 80

112°

CE

RoHS COMPLIANT

Surface Mounted

Recessed

Suspended

Optional

Battery


Dimmable

Colour Temperature


Warm White 3000K

Cool White 4000K

Daylight 6500K

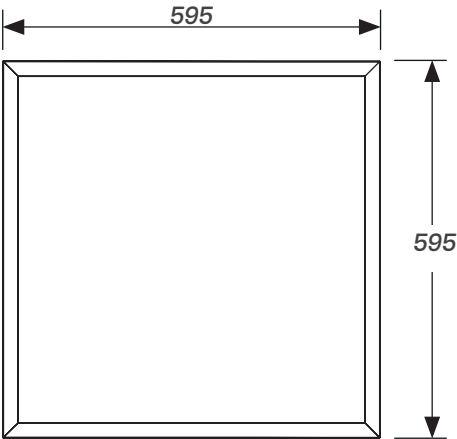


Code	Power	Lumen	Size (L x W x H)
LPLS2224	20W	2000 lm	595 x 595 x 12mm
LPLS2224B	20W	2000 lm	595 x 595 x 12mm
LPLS2236	36W	3600 lm	595 x 595 x 12mm
LPLS2236B	36W	3600 lm	595 x 595 x 12mm
LPLS2236D	36W	3600 lm	595 x 595 x 12mm
LPLS2236BD	36W	3600 lm	595 x 595 x 12mm

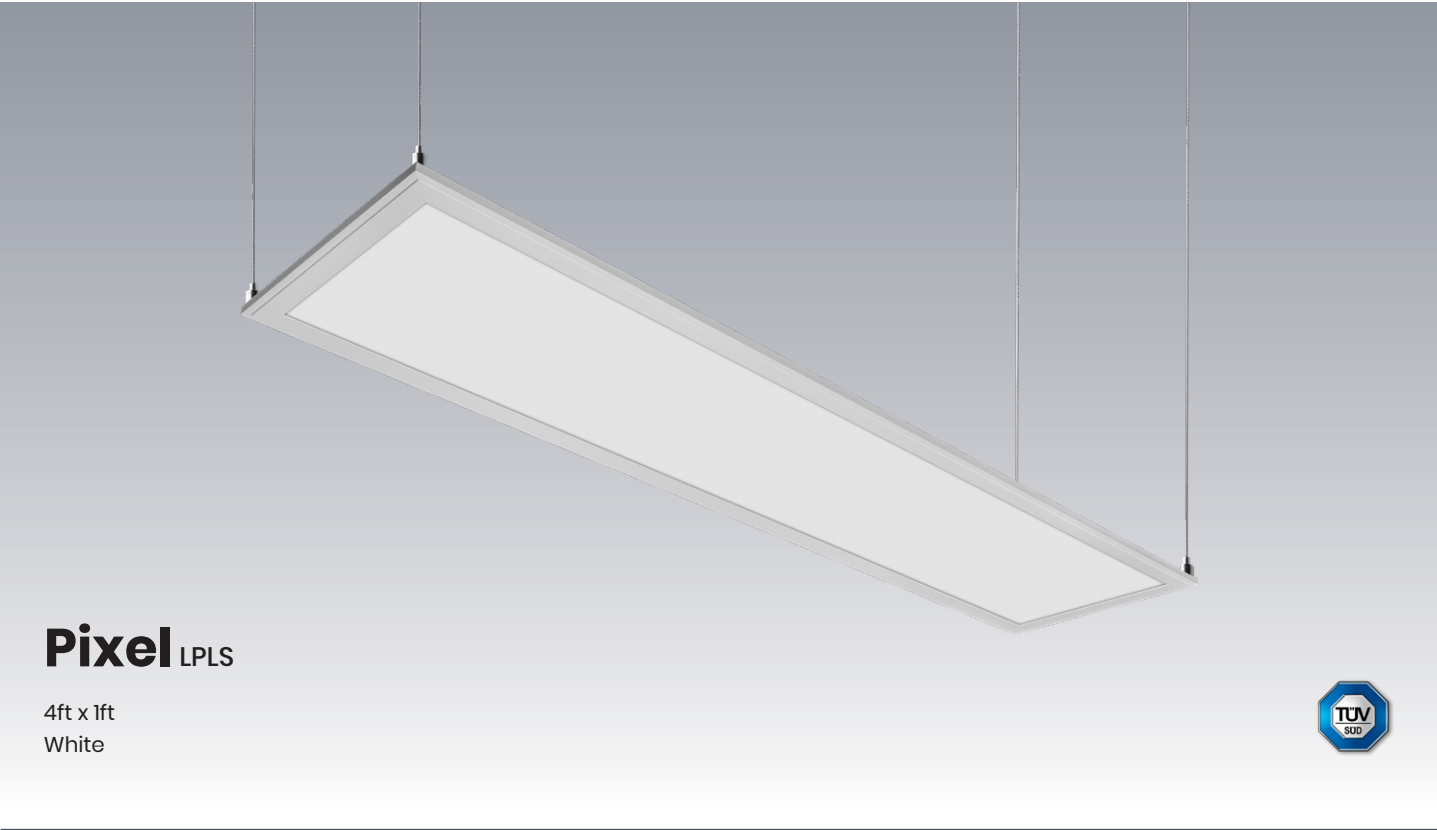

Pixel LPLS

4ft x 1ft
White

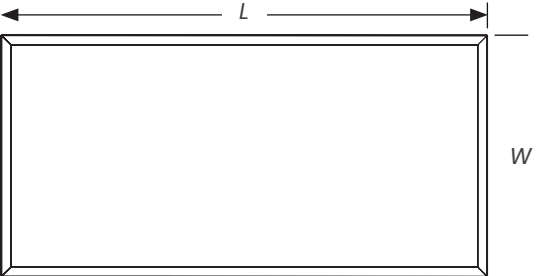

Key Features

IP20

50,000 Hrs

PF > 0.9

CRI > 80

112°

CE

RoHS COMPLIANT

Surface Mounted

Recessed

Suspended

Optional

Battery

Dimmable

Colour Temperature

Warm White 3000K

Cool White 4000K

Daylight 6500K

Code	Power	Lumen	Size (L x W x H)
LPLS4124	20W	2000 lm	1195 x 295 x 12mm
LPLS4124B	20W	2000 lm	1195 x 295 x 12mm
LPLS4224	20W	2000 lm	1195 x 295 x 12mm
LPLS4224B	20W	2000 lm	1195 x 295 x 12mm
LPLS4136	36W	3600 lm	1195 x 295 x 12mm
LPLS4136B	36W	3600 lm	1195 x 295 x 12mm
LPLS4236	36W	3600 lm	1195 x 295 x 12mm
LPLS4236B	36W	3600 lm	1195 x 295 x 12mm
LPLS4236D	36W	3600 lm	1195 x 295 x 12mm
LPLS4236DB	36W	3600 lm	1195 x 295 x 12mm



Swan Backlit 3606

2ft x 2ft
White
Suspension kit, recessed kit, ceiling surface mounting frame available



Key Features

CRI 80

PF ≥ 0.9

UGR <22

IP20

120°

3000K
3000K
6000K
AVAILABLE

CE

CB

RoHS

ErP

Recessed

Surface Mounted

Suspended

Optional

CRI 90

UGR <19

IP65 FRONT

90°

DIP SWITCH 3 IN 1

DALI

Emergency

Microwave

Wi-Fi

Bluetooth

ZigBee


tuya

Colour Temperature

Warm White
3000K

Cool White
4000K

Daylight
6000K

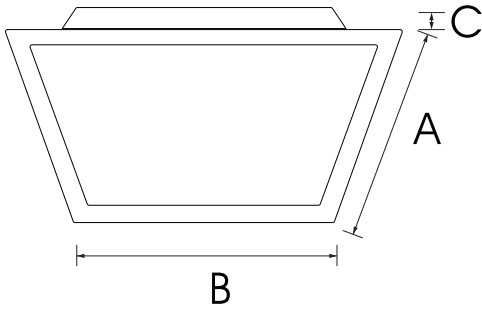

Code	Power	Lumen	Size (A x B x C)
T3606-DMH	30W	3000 lm	595 x 595 x 28mm
T3606-AMH	36W	3600 lm	
T3606-BMH	40W	4000 lm	
T3606-DMP	30W	3600 lm	
T3606-AMP	36W	4320 lm	
T3606-BMP	40W	4800 lm	
T3606-DMS	28W	4200 lm	
T3606-AMS	36W	5400 lm	



Swan Backlit 3312

4ft x 1ft
White
Suspension kit, recessed kit, ceiling surface mounting frame available



Key Features

CRI 80

PF ≥ 0.9

UGR <22

IP20

120°

3000K
3000K
6000K
AVAILABLE

CE

CB

RoHS

ErP

Recessed

Surface Mounted

Suspended

Optional

CRI 90

UGR <19

IP65 FRONT

90°

DIP SWITCH 3 IN 1

DALI

0-10V

Emergency

Microwave

Wi-Fi

Bluetooth

ZigBee

tuya

Colour Temperature

Warm White
3000K

Cool White
4000K

Daylight
6000K

Code	Power	Lumen	Size (A x B x C)
T3312-DMH	30W	3000 lm	295 x 1195 x 28mm
T3312-AMH	36W	3600 lm	
T3312-BMH	40W	4000 lm	
T3312-DMP	30W	3600 lm	
T3312-AMP	36W	4320 lm	
T3312-BMP	40W	4800 lm	
T3312-DMS	28W	4200 lm	
T3312-AMS	36W	5400 lm	



Swan Backlit 3662

2ft x 2ft
White
Suspension kit, recessed kit, ceiling surface mounting frame available



Key Features

CRI 80

PF ≥ 0.9

UGR <22

IP20

120°

3000K
3000K
6000K
AVAILABLE

CE

CB

RoHS

ErP

Recessed

Surface Mounted

Suspended

Optional

CRI 90

UGR <19

IP65 FRONT

90°

DIP SWITCH 3 IN 1

DALI

0-10V

Emergency

Microwave

Wi-Fi

Bluetooth

ZigBee


tuya

Colour Temperature

Warm White
3000K

Cool White
4000K

Daylight
6000K

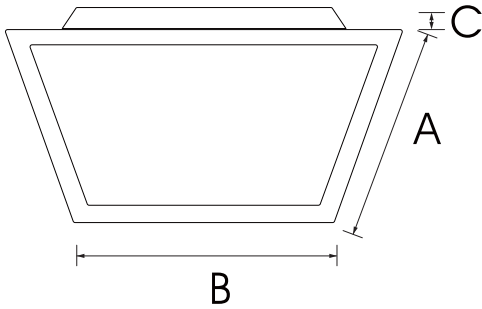

Code	Power	Lumen	Size (A x B x C)
T3662-DMH	30W	3000 lm	620 x 620 x 28mm
T3662-AMH	36W	3600 lm	
T3662-BMH	40W	4000 lm	
T3662-DMP	30W	3600 lm	
T3662-AMP	36W	4320 lm	
T3662-BMP	40W	4800 lm	
T3662-DMS	28W	4200 lm	
T3662-AMS	36W	5400 lm	



Swan Backlit 3612

4ft x 2ft
White
Suspension kit, recessed kit, ceiling surface mounting frame available



Key Features

CRI 80

PF ≥ 0.9

UGR <22

IP20

120°

3000K
4000K
6000K
AVAILABLE

CE

CB

RoHS

ErP

Recessed

Surface Mounted

Suspended

Optional

CRI 90

UGR <19

IP65 FRONT

90°

DIP SWITCH 3 IN 1

DALI

0-10V

Emergency

Microwave

Wi-Fi

Bluetooth

ZigBee

tuya


Colour Temperature

Warm White
3000K

Cool White
4000K


Daylight
6000K

Code	Power	Lumen	Size (A x B x C)
T3612-DMA	30W	3000 lm	595 x 1195 x 34mm
T3612-AMB	36W	3600 lm	

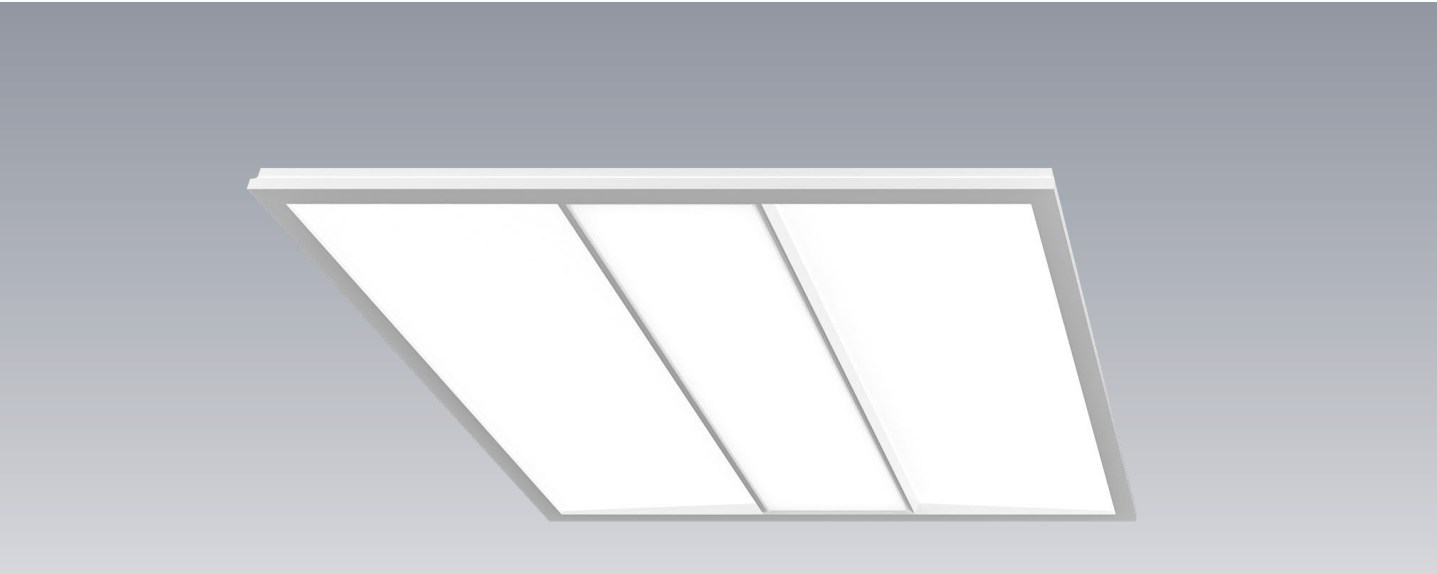

Butterfly Backlit 5606

2ft x 2ft
White
Suspension and recessed installation for option

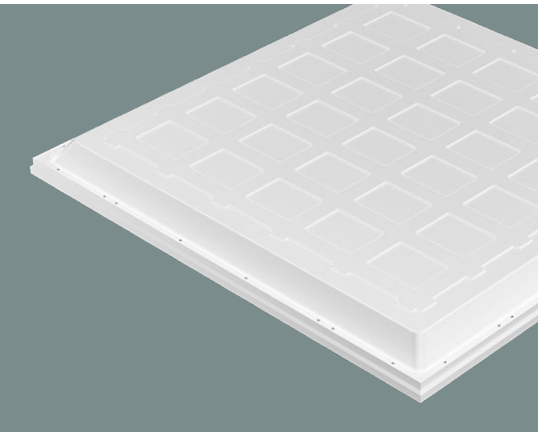

Key Features

CRI 80

PF ≥ 0.9

UGR < 19

IP20

90°

3000K
3000K
4000K
5000K
AVAILABLE

CE

CB

RoHS

ErP

Recessed

Suspended

Optional

CRI 90

DIP SWITCH 3 IN 1

DALI

0-10V

Emergency

Microwave

Wi-Fi

Bluetooth

ZigBee


tuya

Colour Temperature


Warm White
3000K

Cool White
4000K

Daylight
5700K

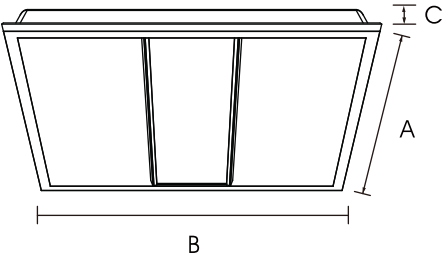


Code	Power	Lumen	Size (A x B x C)
T5606-AMHU	36W	3600 lm	595 x 595 x 47mm
T5606-BMHU	40W	4000 lm	
T5606-DMPU	28W	3360 lm	
T5606-AMPU	36W	4320 lm	

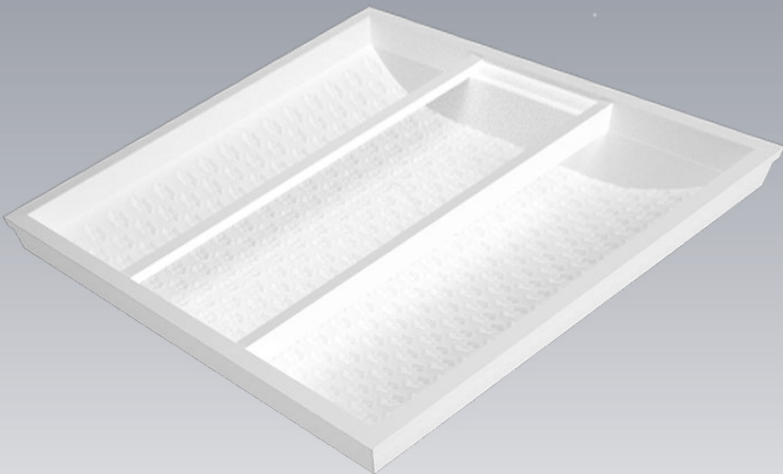

Athene Edgelit 9606

2ft x 2ft
White
Suspension and recessed installation for option

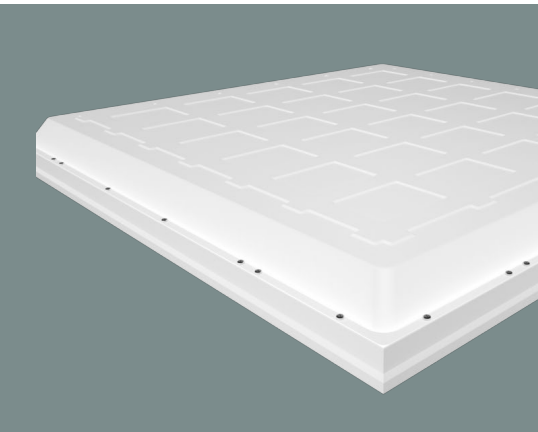

Key Features

CRI 80

PF ≥ 0.9

IP20

140°

3000K
4000K
5000K
AVAILABLE

CE

CB

RoHS

ErP

Recessed

Suspended

Optional

CRI 90

DIP
SWITCH
3 IN 1

DALI

0-10V

Emergency

Microwave

Wi-Fi

Bluetooth

ZigBee


tuya

Colour Temperature


Warm
White
3000K

Cool
White
4000K


Daylight
5700K

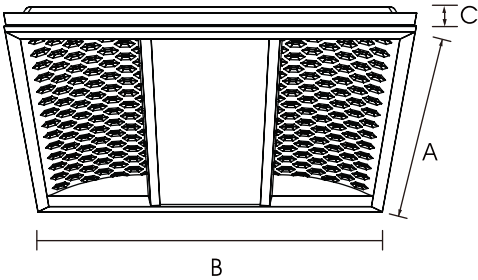

Code	Power	Lumen	Size (A x B x C)
T9606-AMH	36W	3600 lm	595 x 595 x 50mm
T9606-BMH	40W	4000 lm	
T9606-DMP	30W	3600 lm	
T9606-AMP	36W	4320 lm	
T9606-BMP	40W	4800 lm	

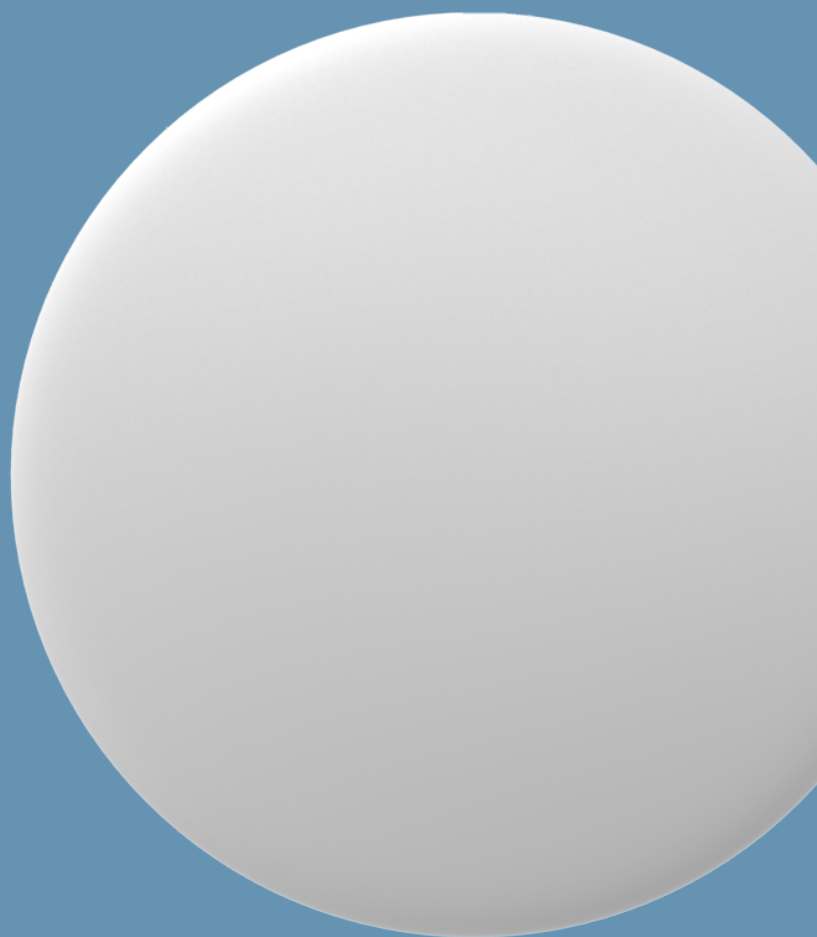

Ceiling Light Series

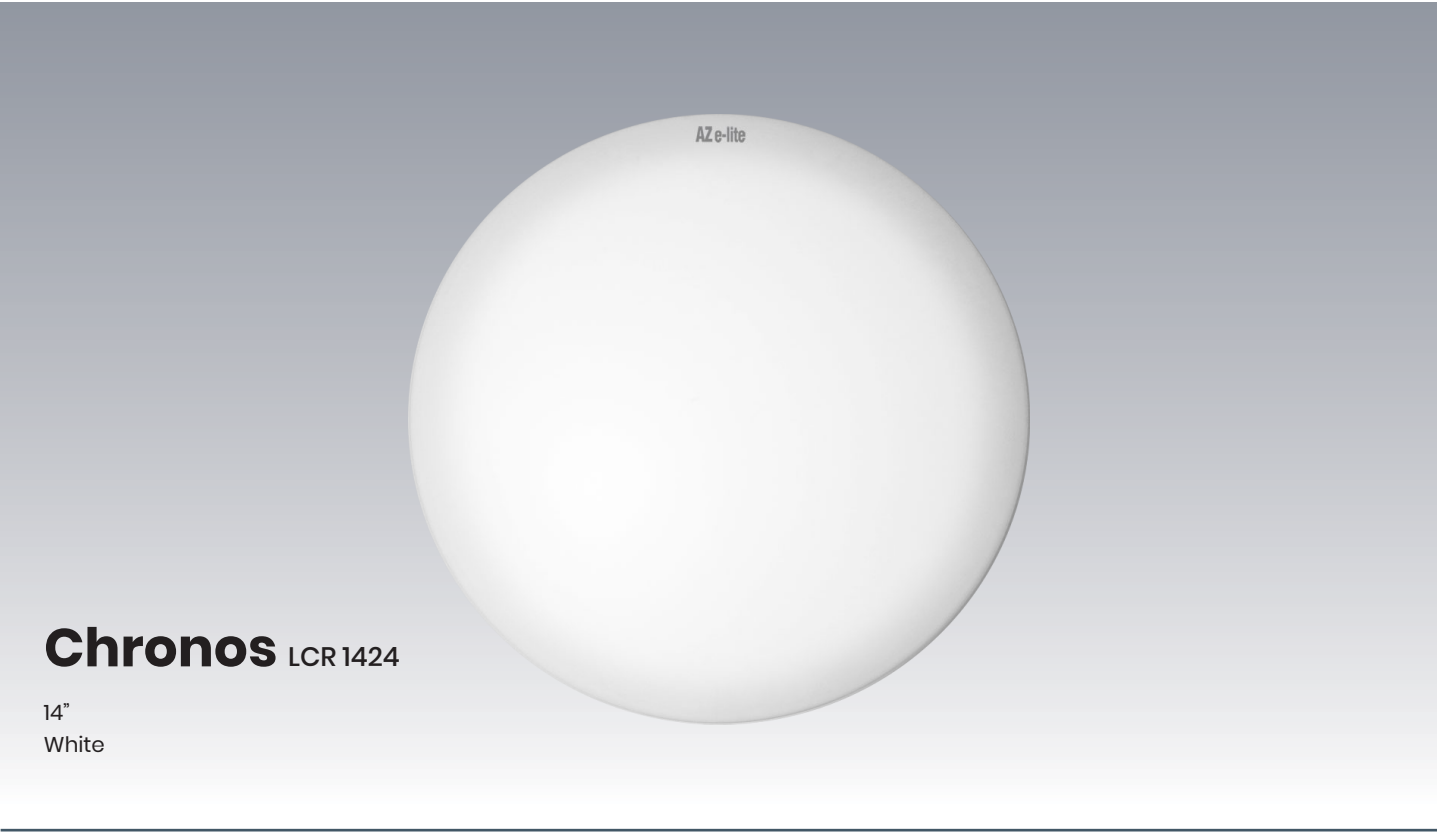

Chronos LCR 1424

14"
White

Key Features

IP54

35,000
Hrs

PF ≥ 0.9

CRI > 80

CE

RoHS
COMPLIANT


Surface
Mounted

Colour Temperature


Warm
White
3000K

Cool
White
4000K

Daylight
6500K

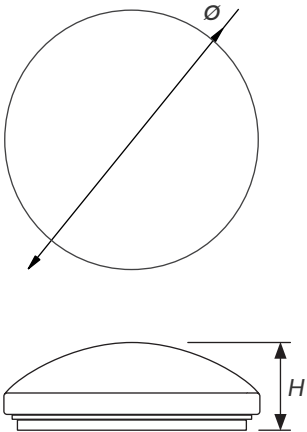

Code	Power	Lumen	Size (D x H)
LCR1424	20W	1400 lm	356 X 118mm

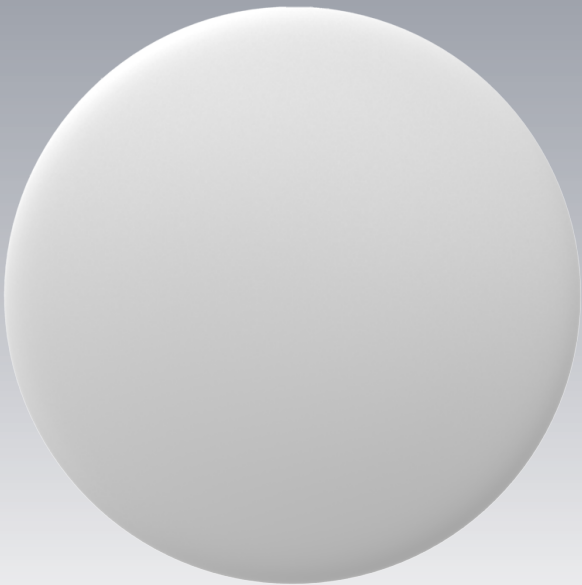

Chronos LCR 19

19.5"
White
Smart Wi-Fi


Key Features





Colour Temperature




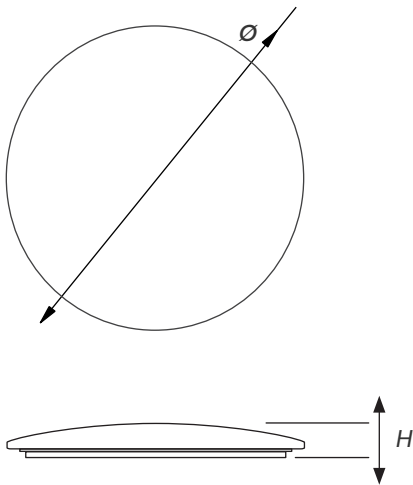

Code	Power	Lumen	Size (D x H)
LCR19-S36-8M2	20W	3,600 lm @ 4000K	497 x 65mm




Flood Light Series

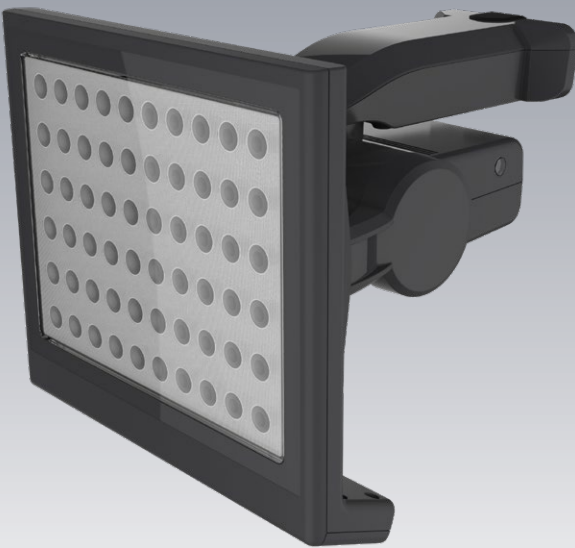

Xenon XL 2/23

Black, White

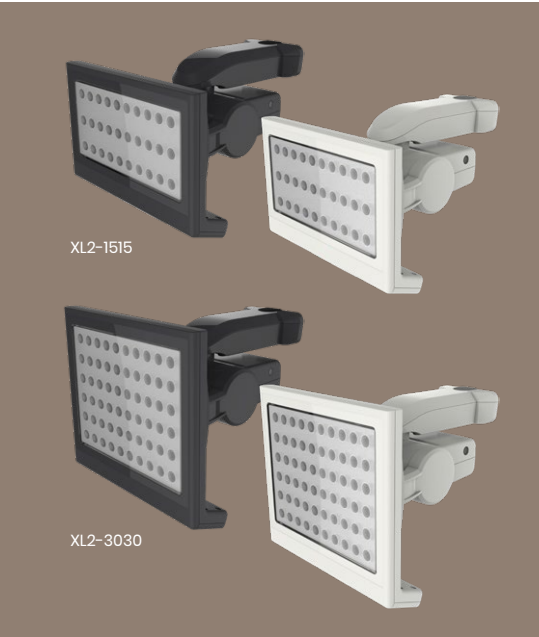

Key Features

IP65

35,000 Hrs

PF ≥ 0.9

CRI > 80

CE

RoHS COMPLIANT

Remote Control

Motion Sensor

Optional


Colour Temperature

Warm White 3000K

Cool White 4000K



Daylight 6500K

Code	Power	Lumen	Size (L x W x H)
XL2-1515	15W	1500 lm	235 x 210 x 164mm (*without guard)
XL2S-1515	15W	1500 lm	
XL2-3030	30W	3000 lm	235 x 210 x 202mm (*without guard)
XL2S-3030	30W	3000 lm	

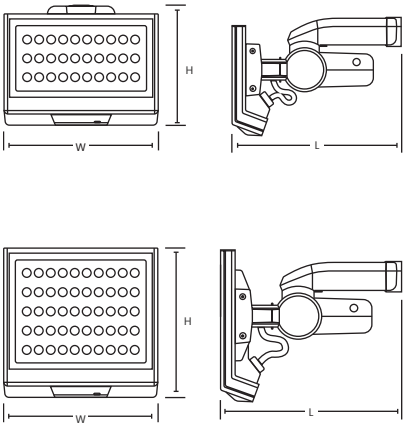

GENIFLOOD

Black

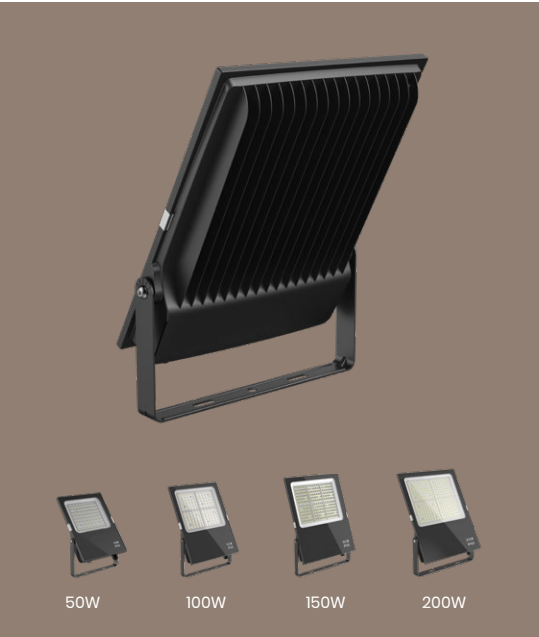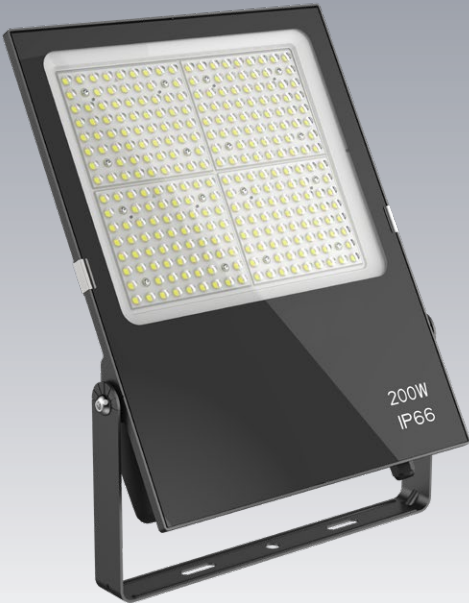

Key Features

IP66

50,000 Hrs

PF ≥ 0.9

CRI > 70


CE

RoHS COMPLIANT

Colour Temperature



Cool White
4000K

Code	Power	Lumen	Size (L x W x H)
UNI-PR13-1-050	50W	5750-6500lm	287 × 211 × 47mm
UNI-PR13-2-100	100W	11500-13000lm	361 × 259 × 51mm
UNI-PR13-3-150	150W	17250-19500lm	450 × 335 × 52mm
UNI-PR13-4-200	200W	23000-26000lm	476 × 361 × 61mm

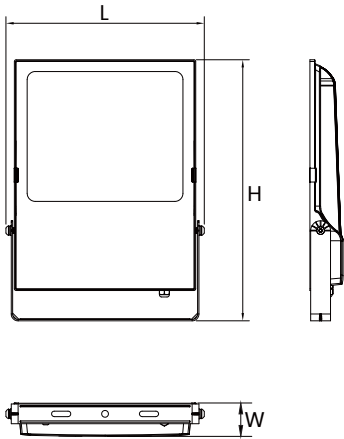

Sefra SEF

Black

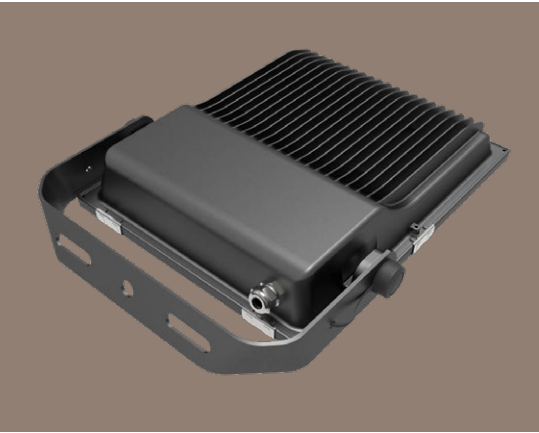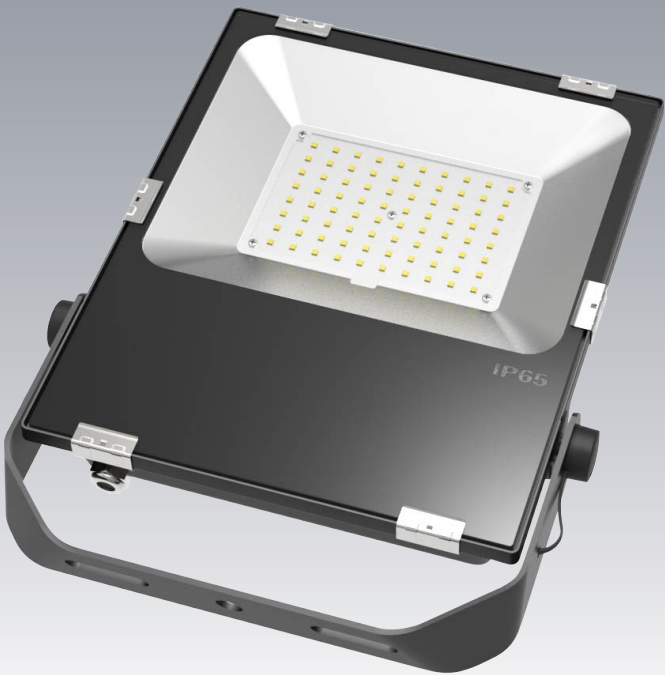

Key Features

IP65

50,000 Hrs

PF ≥ 0.9

CRI > 80

CE

RoHS COMPLIANT


Colour Temperature


Warm White 3000K

Cool White 4000K

Daylight 6500K


Code	Power	Lumen	Size (L x W x H)
SEF-10W	10W	1100LM +/- 10%	166 x 116 x 32mm
SEF-20W	20W	2200LM +/- 10%	216 x 152 x 40mm
SEF-30W	30W	3300LM +/- 10%	226 x 167 x 40mm
SEF-50W	50W	6000LM +/- 10%	310 x 220 x 60mm
SEF-80W	80W	9600LM +/- 10%	354 x 245 x 60mm
SEF-100W	100W	12000LM +/- 10%	402 x 295 x 60mm
SEF-150W	150W	18000LM +/- 10%	430 x 330 x 60mm
SEF-200W	200W	24000LM +/- 10%	470 x 360 x 60mm

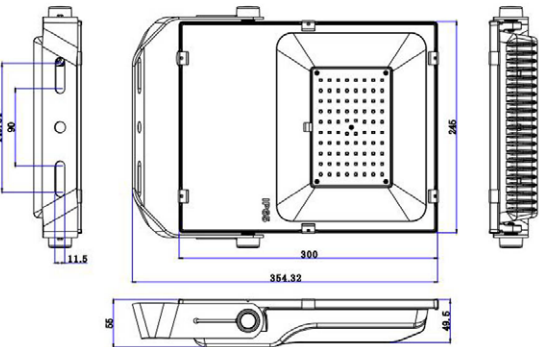

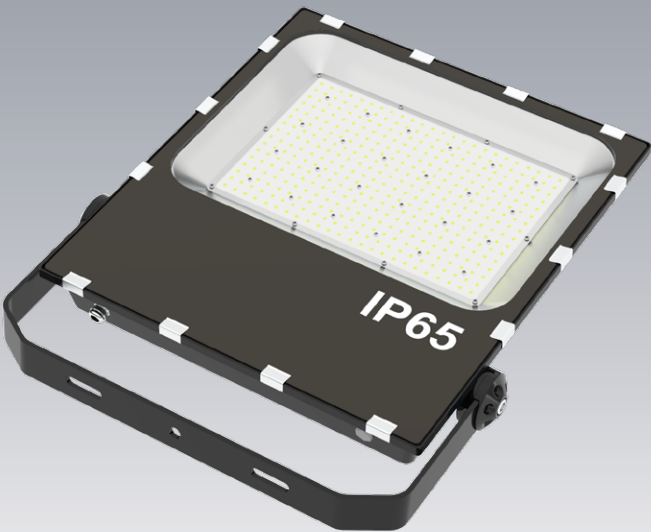

Sefra SEF High Lumen

Black

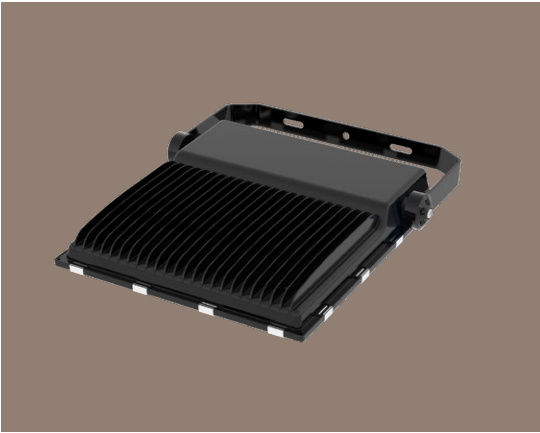

Key Features

IP65

50,000 Hrs

PF ≥ 0.9

CRI > 80

CE

RoHS COMPLIANT


Colour Temperature

Warm White 3000K


Cool White 4000K

Daylight 6500K

Code	Power	Lumen	Size (L x W x H)
SEF-100W	100W	14500LM +/- 10%	402 x 295 x 60mm
SEF-150W	150W	21750LM +/- 10%	430 x 330 x 60mm
SEF-200W	200W	29000LM +/- 10%	470 x 360 x 60mm

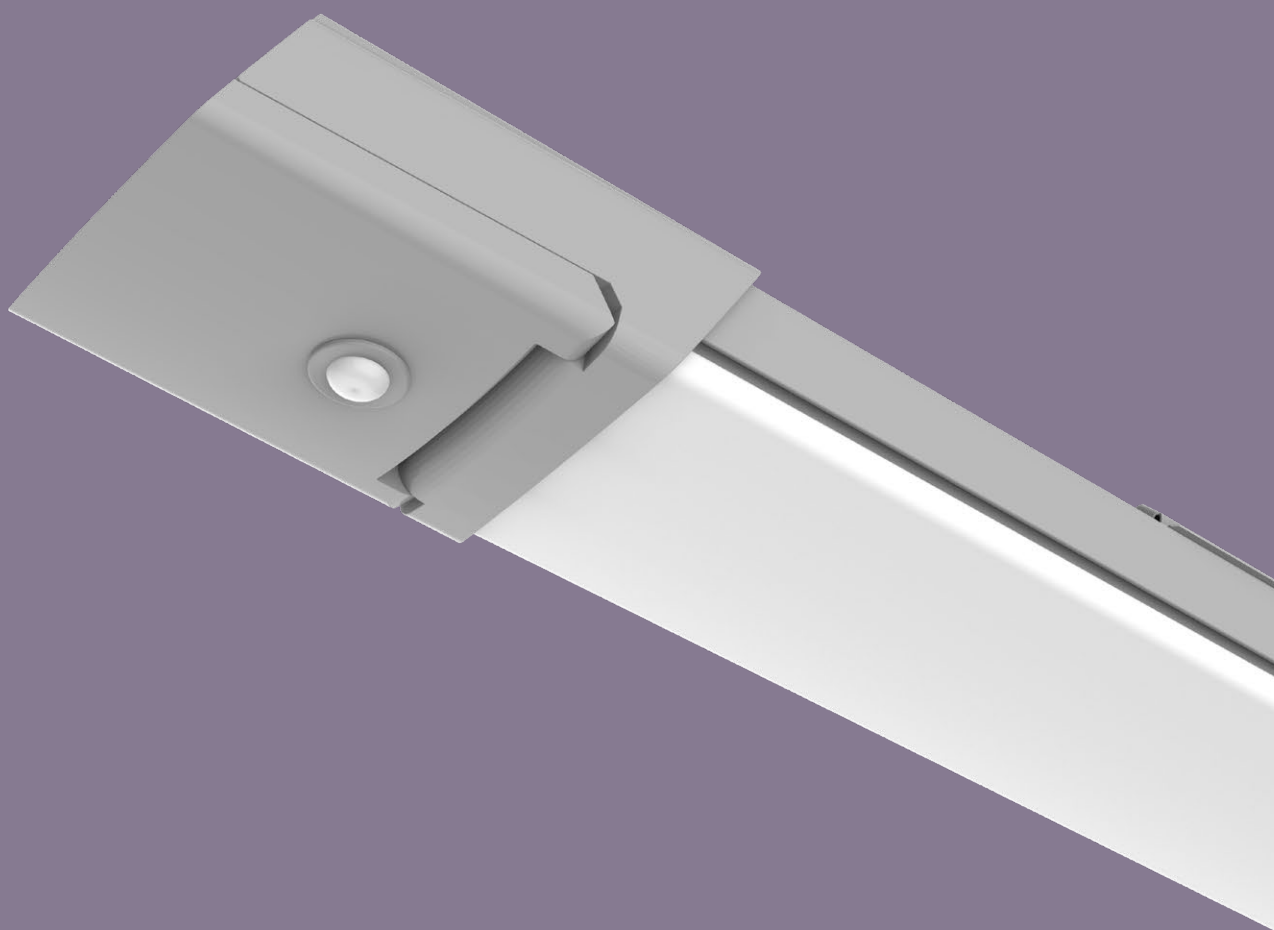


Low Bay Light Series

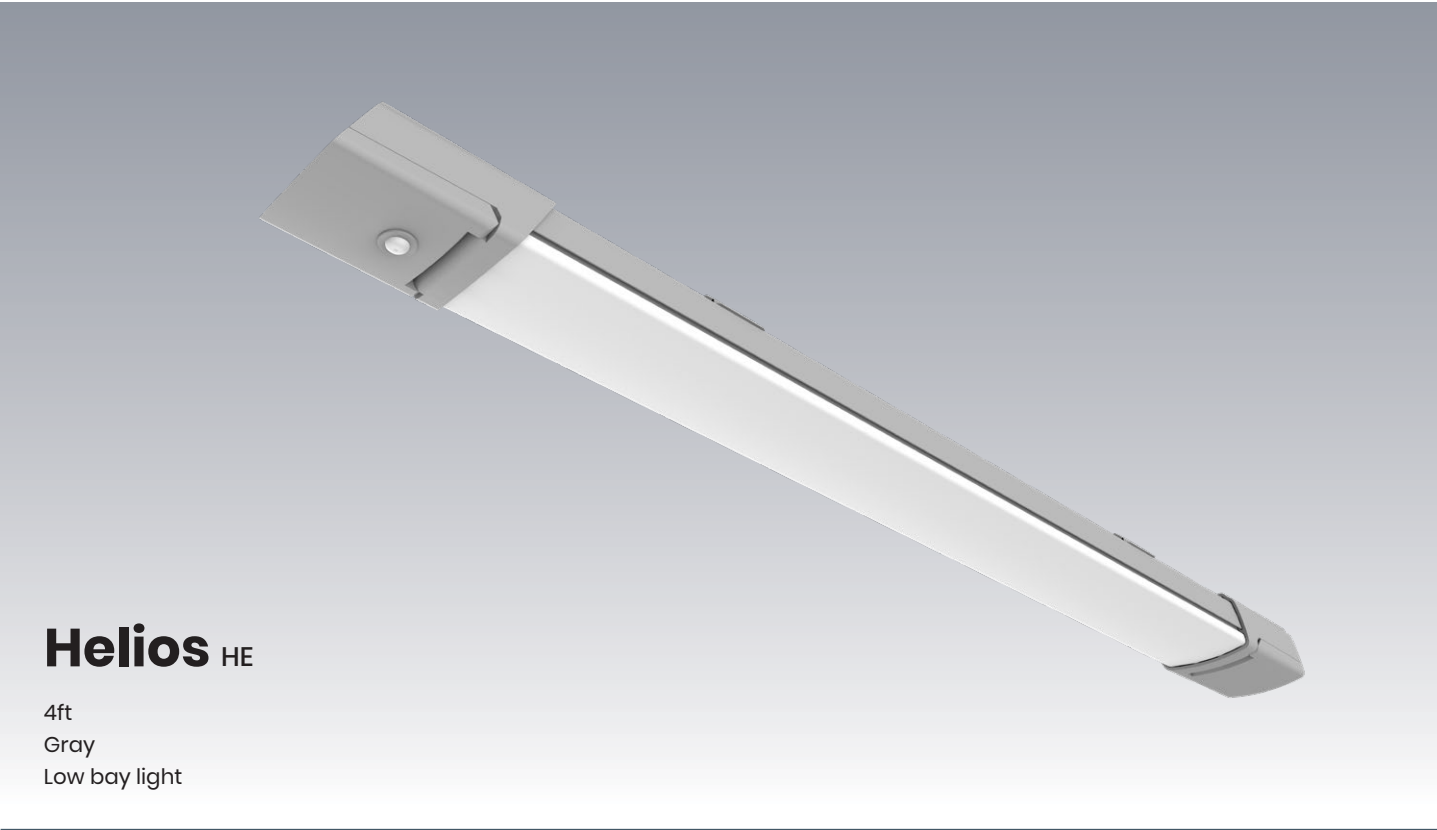

Helios HE

4ft
Gray
Low bay light

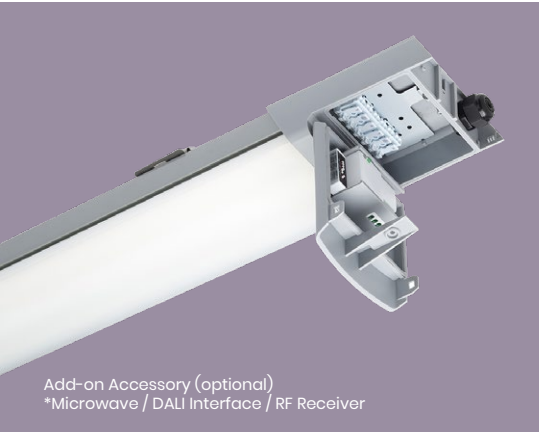

Add-on Accessory (optional)
*Microwave / DALI Interface / RF Receiver

Key Features

IP66

50,000 Hrs

PF ≥ 0.9

CRI > 80

Dimmable

CE

RoHS COMPLIANT

Surface Mounted

Suspended


Optional

Battery

Colour Temperature


Cool White 4000K

Code	Power	Lumen	Size (L x W x H)
HELIOS HE36W	36W	4500 lm	1260 x 110 x 60mm
HELIOS HE52W	52W	6500 lm	

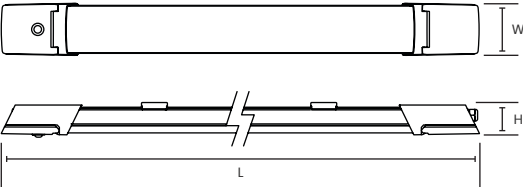



Tri-Proof Light Series

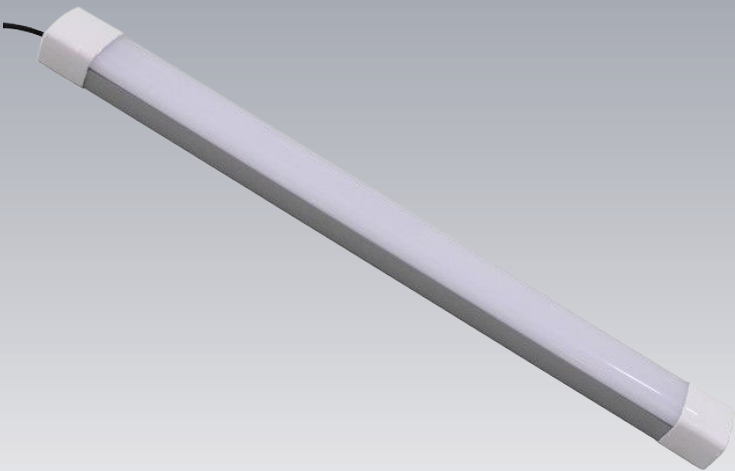

Ltyon LTPL

4ft
Aluminium
Tri-proof light

Key Features






Optional



Colour Temperature


Cool
White
4000K

Code	Power	Lumen	Size (L x W x H)
LTPL4120	20W	1900 lm	1200 x 91 x 74 mm
LTPL4140	40W	3600 lm	

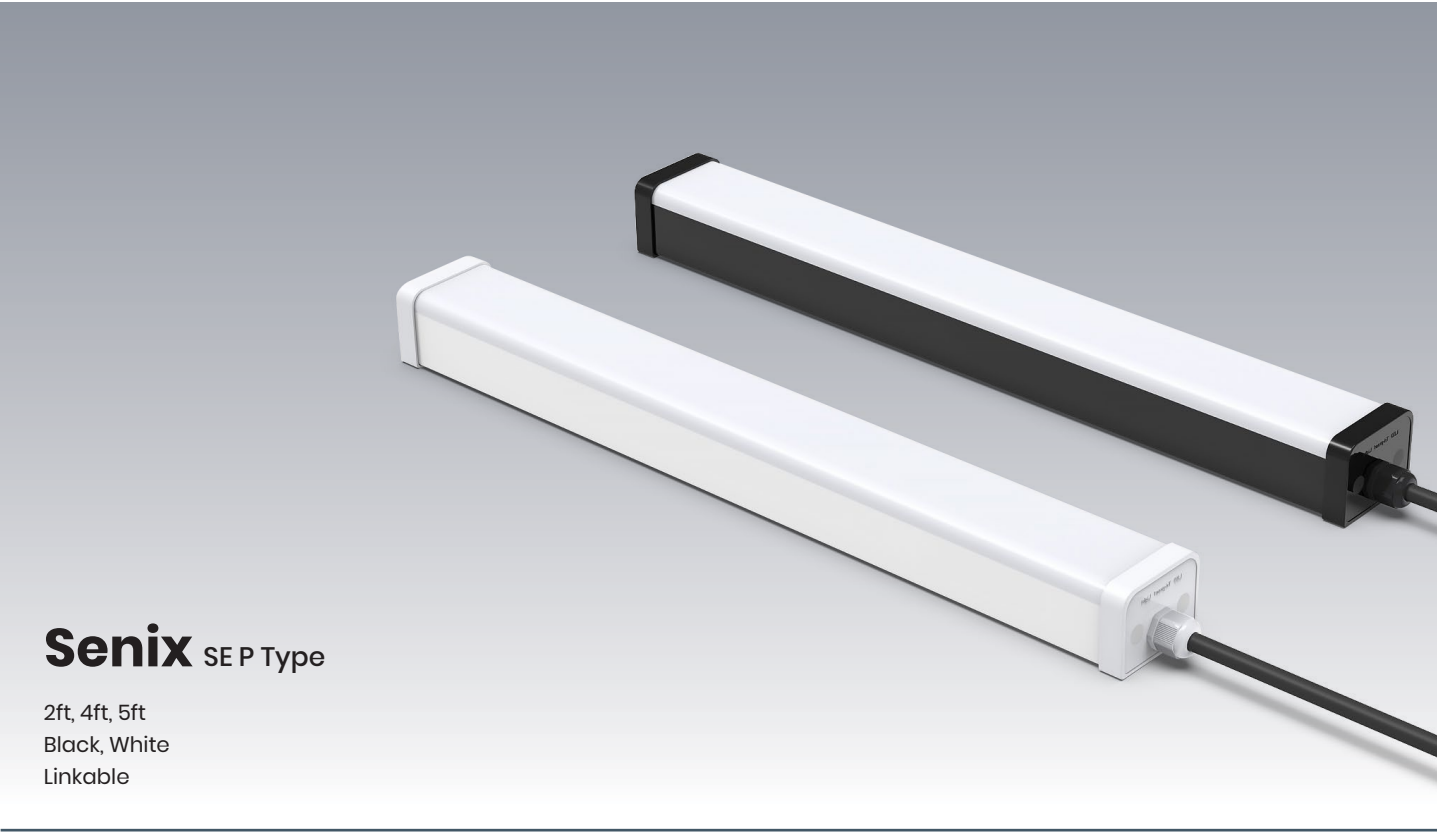

Senix SE P Type

2ft, 4ft, 5ft
Black, White
Linkable

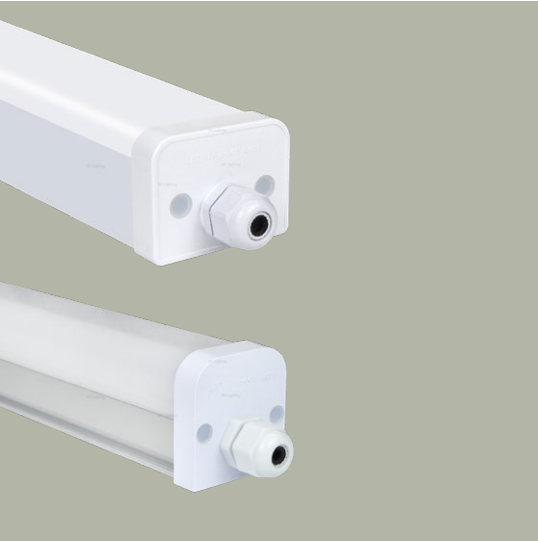

Key Features

IP65

IK10

50,000 Hrs

PF ≥ 0.9

CRI > 80

Dust Proof

Water Resistant

FLICKER FREE

CE

RoHS COMPLIANT

Surface Mounted

Suspended

Optional

0-10V Dimmable

DALI Dimmable

Microwave Sensors


Colour Temperature

Warm White 3000K

Cool White 4000K


Daylight 6500K

Code	Power	Lumen	Size (L x W x H)
SE-2T20W-P	20W	2600LM +/- 10%	600 x 71 x 55 mm
SE-4T20W-P	20W	2600LM +/- 10%	1200 x 71 x 55 mm
SE-4T30W-P	30W	3900LM +/- 10%	1200 x 71 x 55 mm
SE-4T40W-P	40W	5200LM +/- 10%	1200 x 71 x 55 mm
SE-5T50W-P	50W	6500LM +/- 10%	1500 x 71 x 55 mm

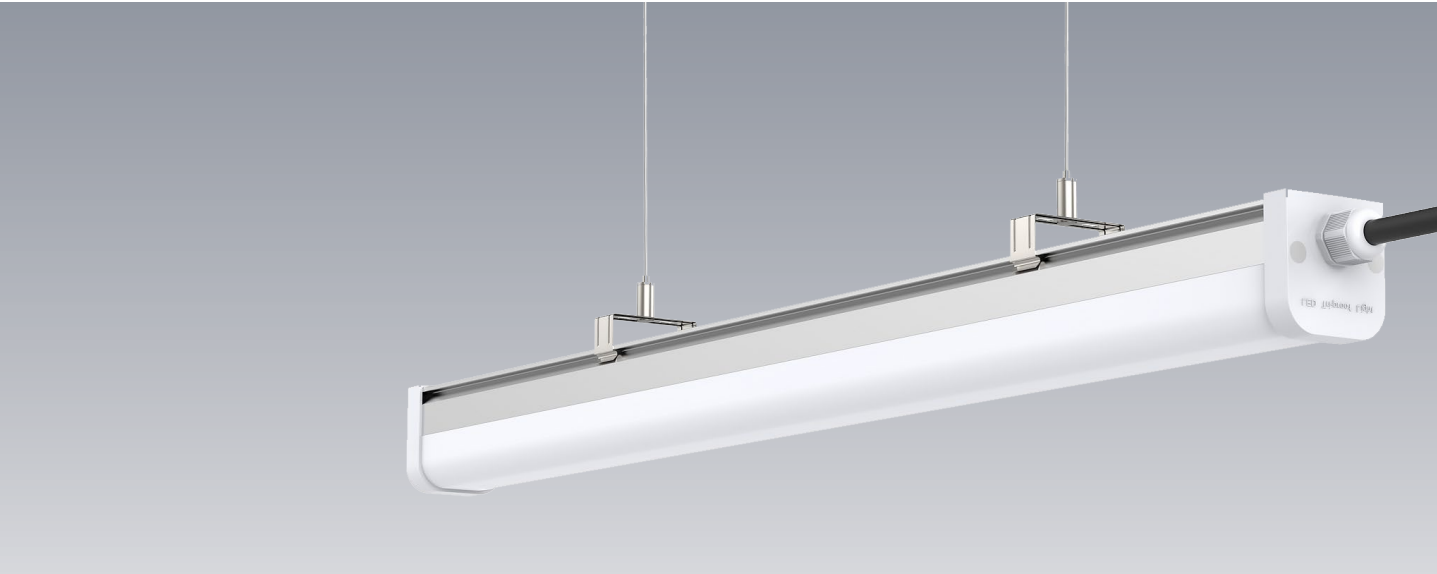

Senix SE Mini Type

2ft, 4ft, 5ft
Black, White
Linkable

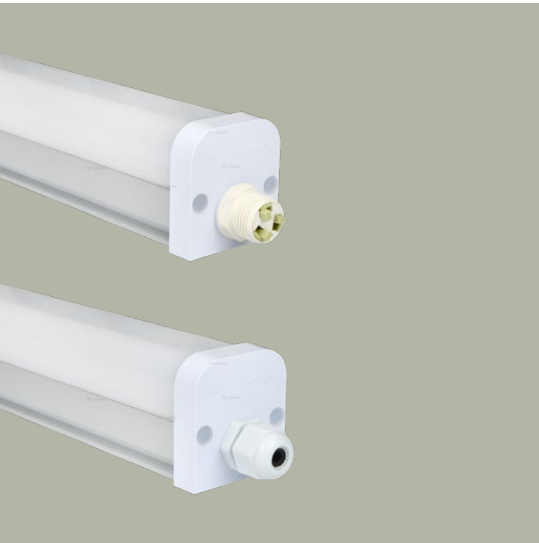

Key Features



Optional



Colour Temperature



Code	Power	Lumen	Size (L x W x H)
SE-2T20W-M	20W	2700LM +/- 10%	600 x 45 x 49 mm
SE-4T20W-M	20W	2700LM +/- 10%	1200 x 45 x 49 mm
SE-4T30W-M	30W	4050LM +/- 10%	1200 x 45 x 49 mm
SE-4T40W-M	40W	5400LM +/- 10%	1200 x 45 x 49 mm
SE-5T50W-M	50W	6750LM +/- 10%	1500 x 45 x 49 mm



Senix SE W

2ft, 4ft, 5ft
White
Linkable



Key Features

IP65

IK10

50,000 Hrs

PF ≥ 0.9

CRI > 80

Dust Proof

Water Resistant

FLICKER FREE

CE

RoHS COMPLIANT

Surface Mounted

Suspended

Optional

0-10V Dimmable

DALI Dimmable

Microwave Sensors

Colour Temperature

Warm White 3000K

Cool White 4000K

Daylight 6500K

Code	Power	Lumen	Size (L x W x H)
SE-2T20W	20W	2600LM +/- 10%	600 x 85 x 74 mm
SE-4T40W	40W	5200LM +/- 10%	1200 x 85 x 74 mm
SE-4T50W	50W	6500LM +/- 10%	1200 x 85 x 74 mm
SE-5T50W	50W	6500LM +/- 10%	1500 x 85 x 74 mm
SE-5T60W	60W	7800LM +/- 10%	1500 x 85 x 74 mm



Outdoor Bulk Head Series



Zyra ZWEXP

10"
White

Key Features

IP65

50,000
Hrs

PF ≥ 0.9

CRI > 80

120°



RoHS
COMPLIANT

Surface
Mounted


Colour Temperature

Warm
White
3000K


Cool
White
4000K

Daylight
6500K

Code	Power	Lumen	Size (D x H)
ZWEXP001	8.5W	1000 lm	260 x 126mm

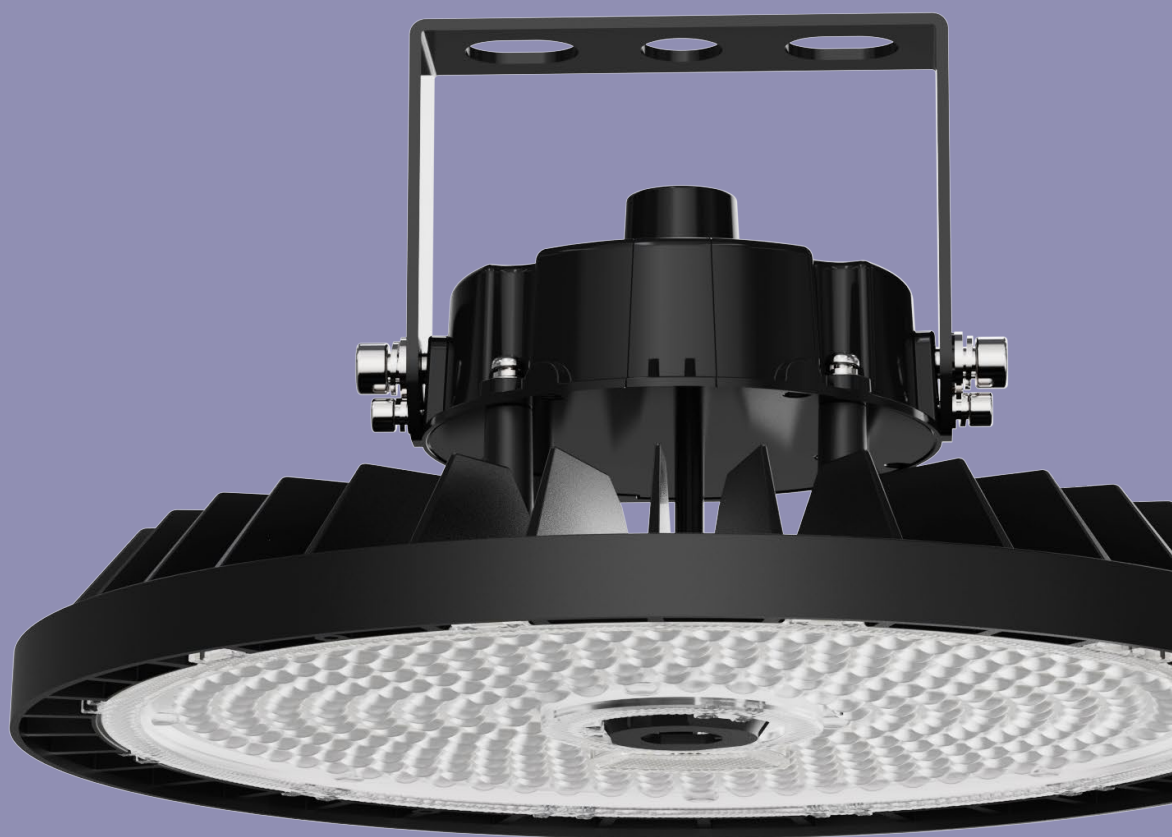


Highbay Series

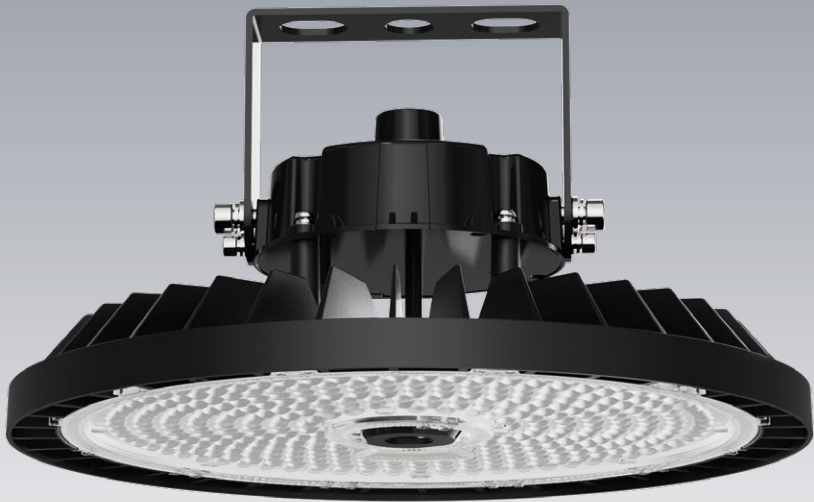

Brion BT

Black , White, Grey

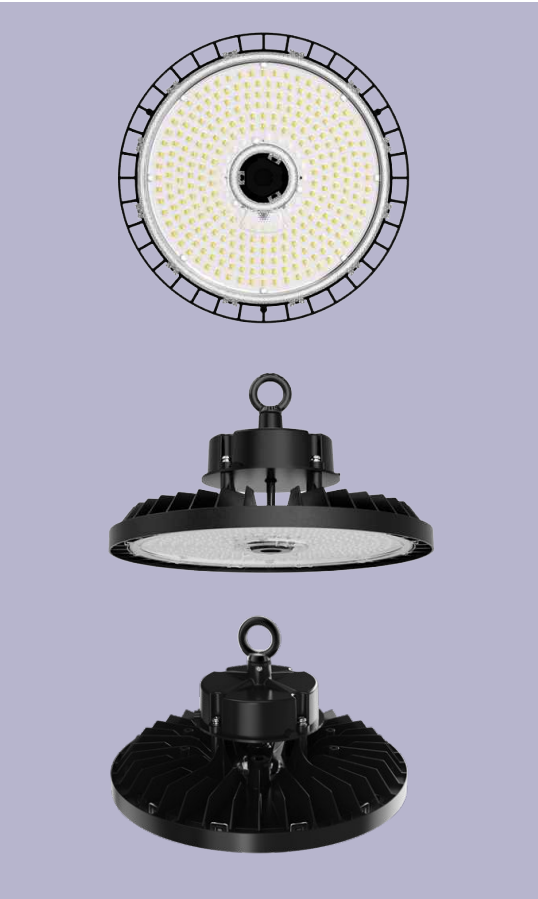

Key Features







Colour Temperature



Code	Power	Lumen	Size (D x H)
BT-PA80U-AF	80W	14800 lm	246 x 115mm
BT-PA100U-AF	100W	18500 lm	246 x 115mm
BT-PA120U-AF	120W	22200 lm	266 x 120mm
BT-PA150U-AF	150W	27750 lm	266 x 120mm
BT-PA200U-AF	200W	37000 lm	300 x 129mm
BT-PA240U-AF	240W	44400 lm	325 x 137mm

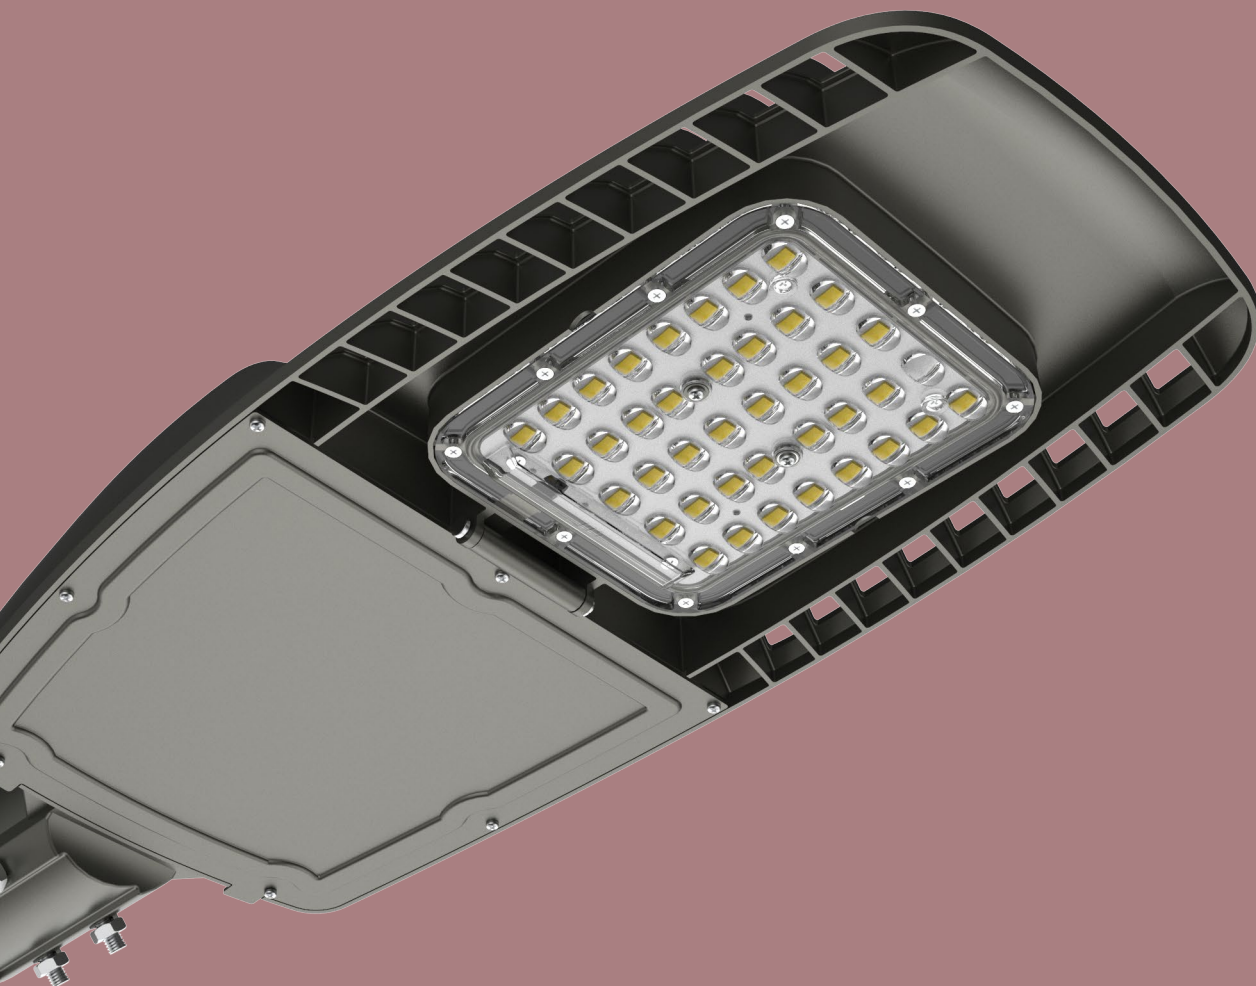


Street Light Series

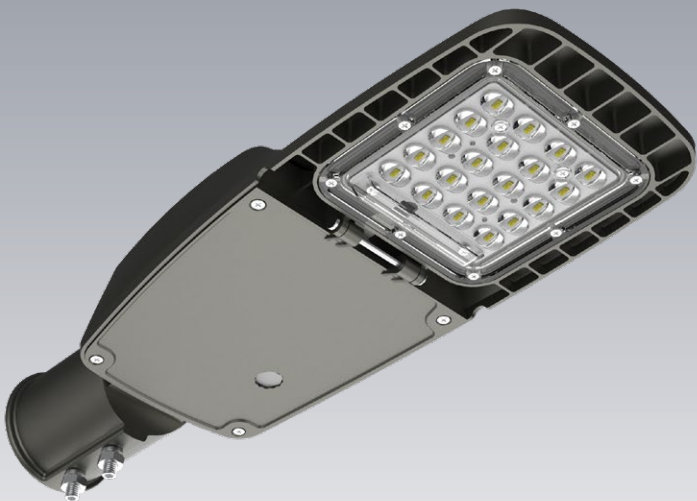

Micro

Dark Grey

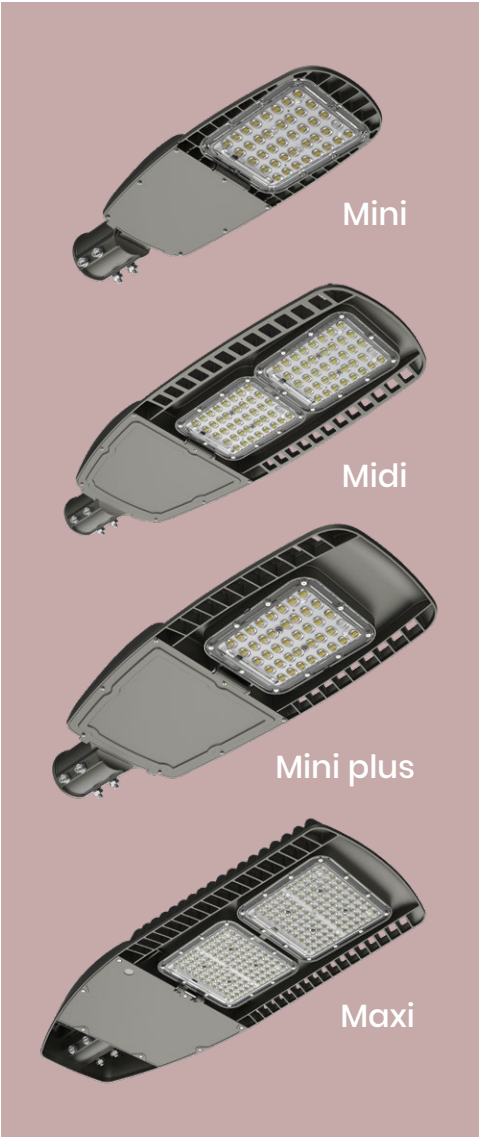

Key Features

IP66

50,000 Hrs

 PF ≥ 0.9

 CRI > 70

IK08



 RoHS COMPLIANT

Colour Temperature

Warm White 3000K

Cool White 4000K

Daylight 6500K


Code	Power	Lumen	Size (L x W x H)
UNI-STA7-0	15-40W	1950-6000 lm	430 x 155 x 91mm
UNI-STA7-1	50-60W	6500-9000 lm	490 x 176 x 86mm
UNI-STA7-3	120-150W	15600-22500 lm	605 x 240 x 89mm
UNI-STA7-4	70-100W	9100-15000 lm	715 x 270 x 94mm
UNI-STA7-5	180-300W	23400-45000 lm	800 x 318 x 91mm

Urban Luminaires Series



Taper 1056

Black

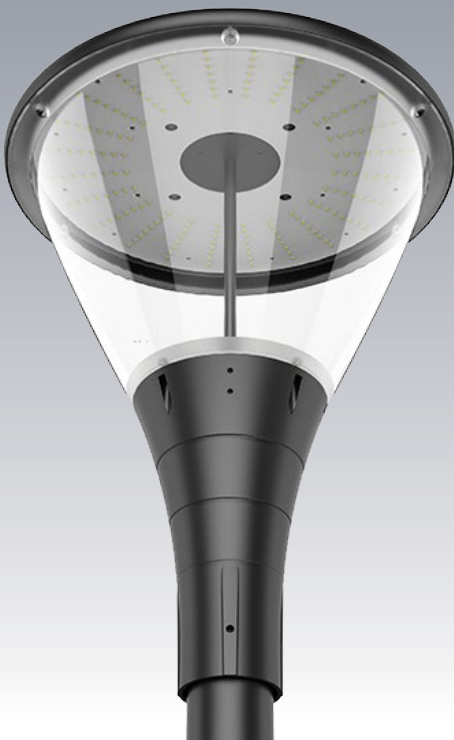

Key Features

IP66

50,000 Hrs

CE


RoHS COMPLIANT

Colour Temperature

Warm White 3000K

Cool White 4000K

Daylight 6500K

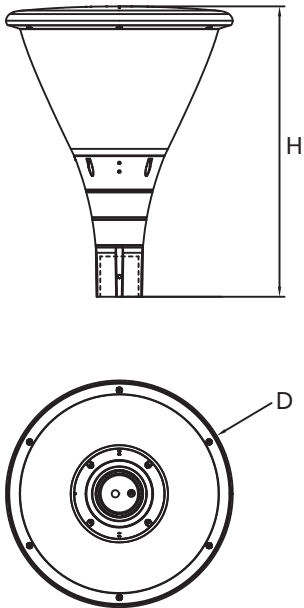

Code	Power	Lumen	Size (D x H)
KL-JD-1056A	30W	4650 lm	450 X 577mm
KL-JD-1056B	60W	9300 lm	
KL-JD-1056C	100W	15500 lm	

Aurora

Black
Aluminum alloy ,Polycarbonate
optical Lens, Powder coating



Key Features

IP66

50,000 Hrs

PF ≥ 0.9

CRI > 80

IK09

TYPE V

CE


RoHS COMPLIANT

Colour Temperature

Warm White 3000K

Cool White 4000K

Code	Power	Lumen	Size (D x H)
K-BL01-014	20W	2800 lm	165 × 500mm
	40W	5600 lm	
	60W	8400 lm	
K-BL01-024	20W	2800 lm	165 × 900mm
	40W	5600 lm	
	60W	8400 lm	

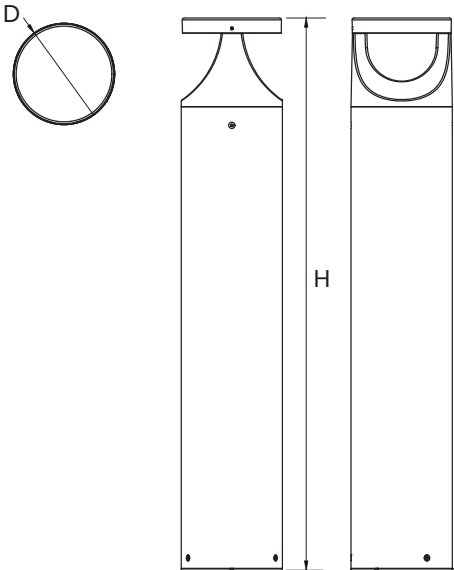

Arboris

Black
Aluminum alloy ,Polycarbonate
optical Lens, Powder coating

8.203



Key Features

IP66

50,000 Hrs

PF ≥ 0.9

CRI > 70

IK10

TYPE IV

TYPE V

CE

RoHS COMPLIANT


Colour Temperature


Warm White 3000K

Cool White 4000K

Daylight 6500K


Code	Power	Lumen	Size (D x H)
K-BL03-014	14W	1400 - 1820 lm	203 x 475mm
K-BL03-025	25W	2500 - 3250 lm	203 x 975mm

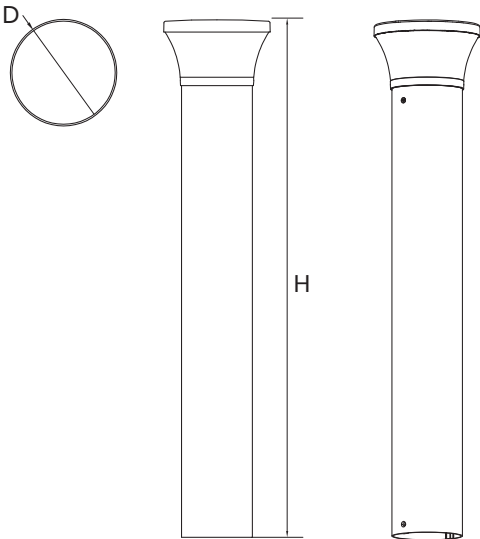

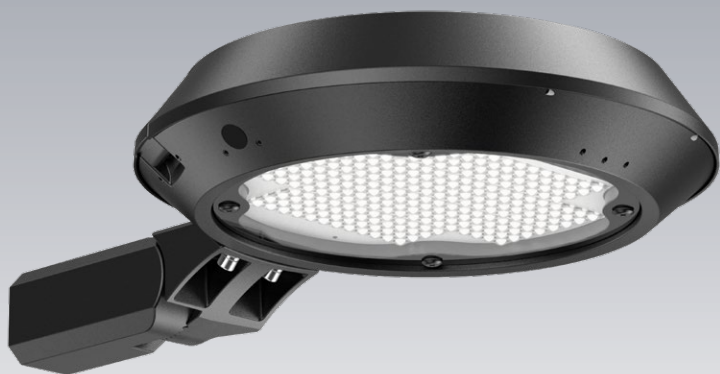

Lunera

Black
7 different mounting brackets to match
the diverse needs of urban lights

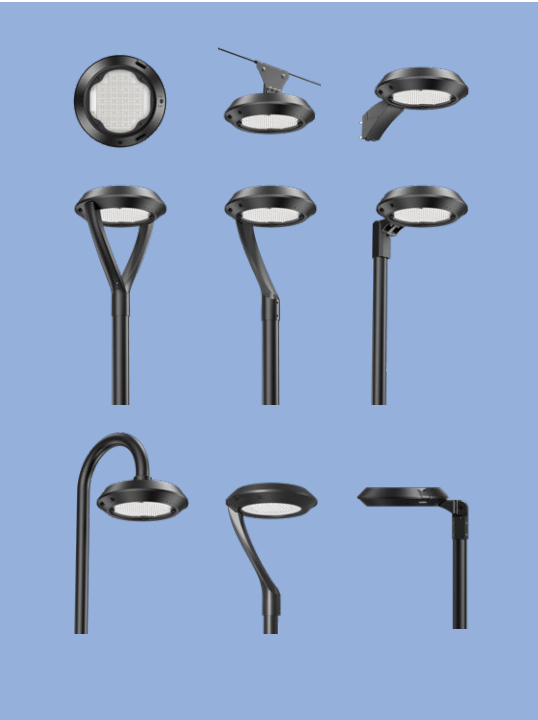

Key Features

IP66

50,000 Hrs

PF ≥ 0.9

CRI > 70

IK10

TYPE V

CE

RoHS COMPLIANT

Colour Temperature

Warm White 3000K


Cool White 4000K

Daylight 6500K

Code	Power	Lumen	Size (D x H)
ST40-030	30W	4500 lm	400 × 510mm
ST40-050	50W	7500 lm	
ST40-060	60W	9000 lm	
ST40-075	75W	11250 lm	
ST40-100	100W	15000 lm	
ST40-120	120W	18000 lm	
ST40-150	150W	22500 lm	




LED Drivers Series

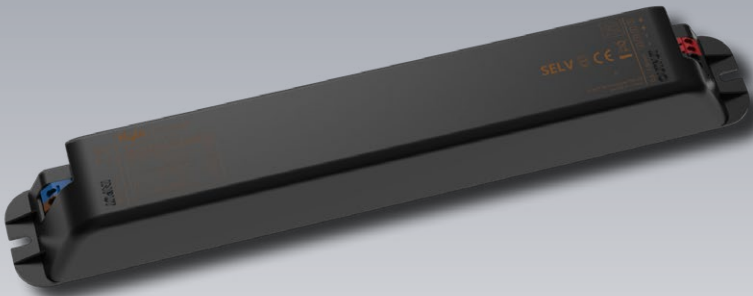

LDV

Black
LED Driver

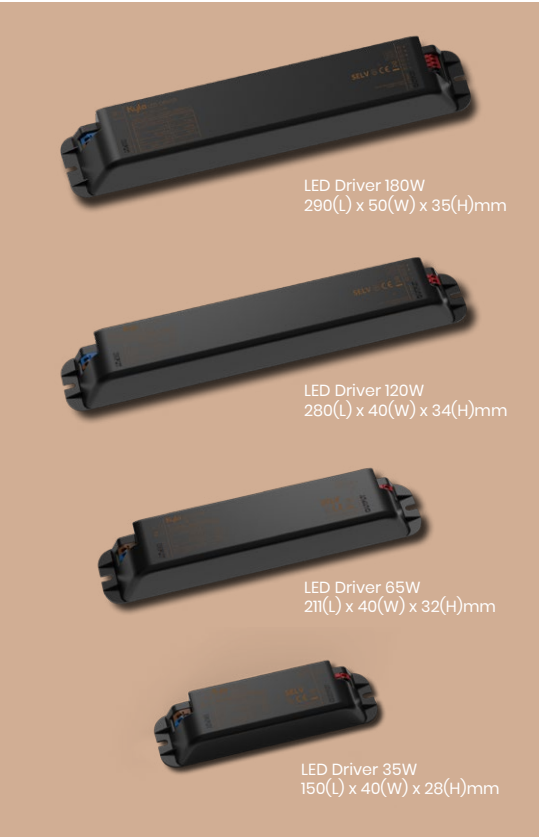


Key Features

220-240V
50/60Hz

50,000
Hrs





CE

LED Driver	35W	65W	120W	180W
Input Voltage	220-240V 50/60Hz			
Input Current	0.22A	0.41A	0.75A	1.1A
Power Factor	>0.9	>0.9	>0.9	>0.9
Output Power	35W	65W	120W	180W
Output Voltage	24VDC	24VDC	24VDC	24VDC
Output Current	1.46A	2.7A	5A	7.5A
Lifetime	>50K	>50K	>50K	>50K
Output Connector	1 x 2	1 x 2	2 x 2	3 x 2
Approval marks	CE, SLEV (Plan)			

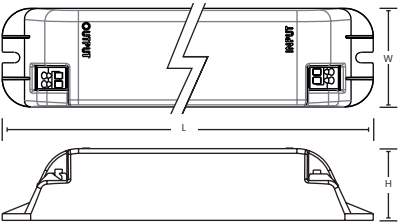



Smart Lighting System Series

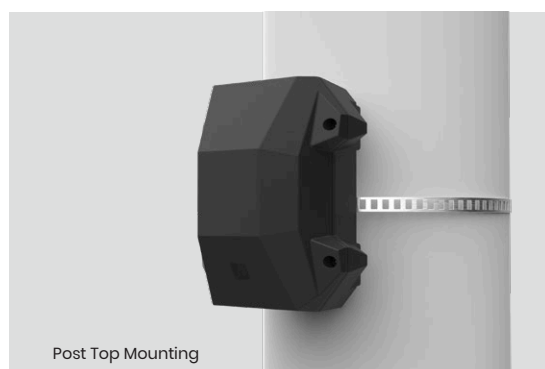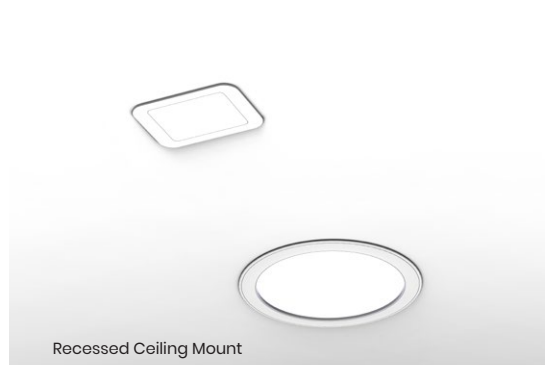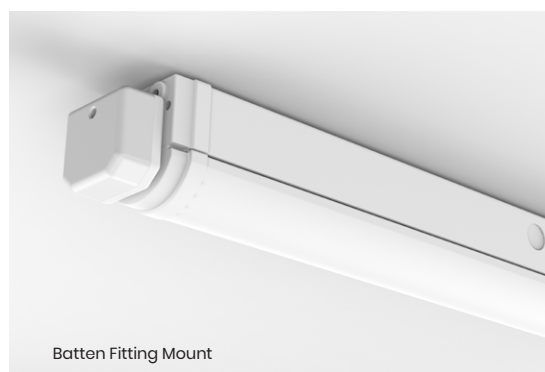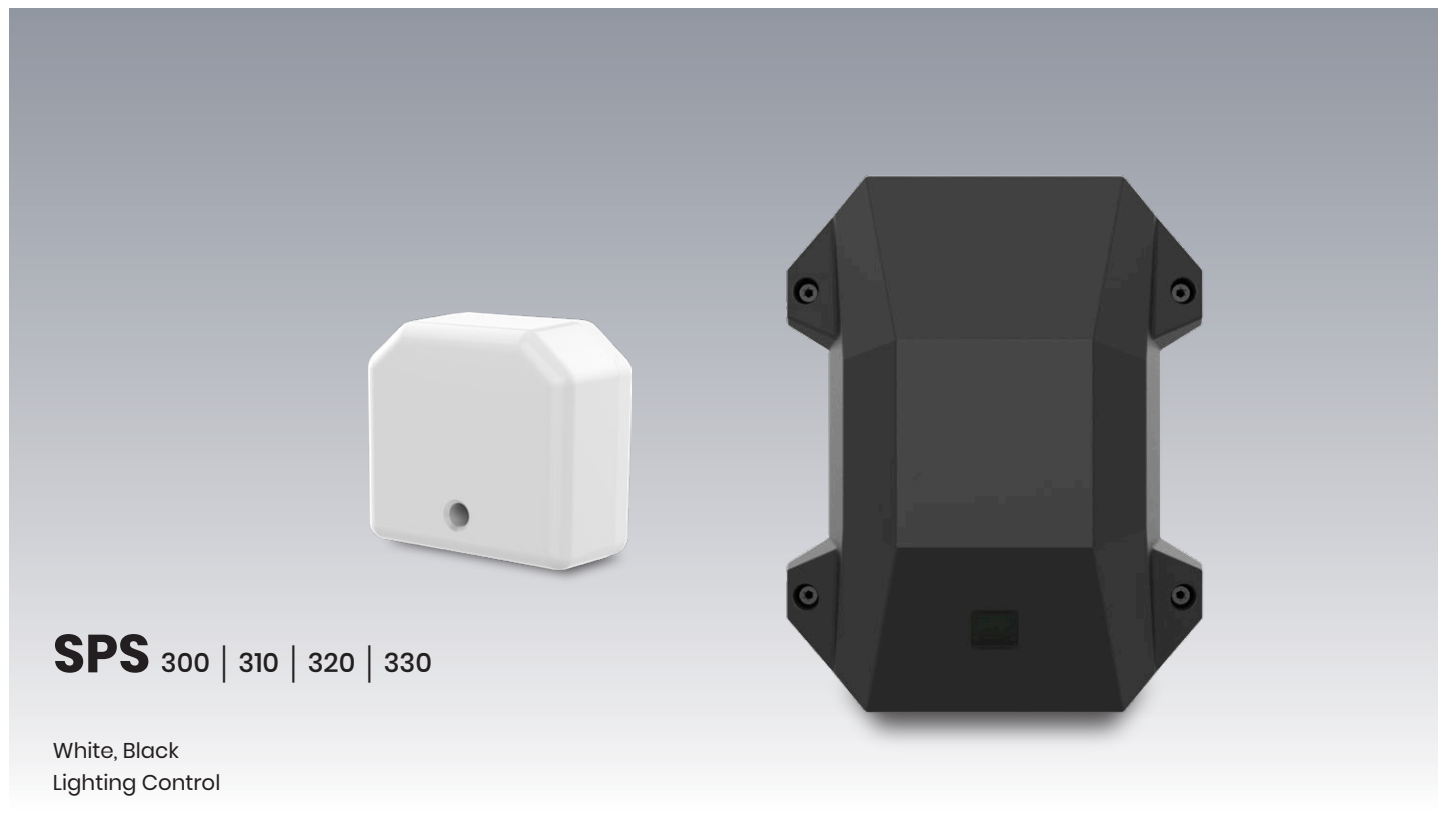

Key Features

- Predictive lighting illumination
- Soft dimming
- Programmable lighting profiles
- Wireless networks sensor and smart controls
- Self-diagnostic & fail-safe mechanism
- Remote configuration, control & monitoring
- Ambient Light Sensing
- Fault Reporting
- Enhanced Electrical Savings
- Emergency Luminaire Self Test
- Dynamic Auto Positioning

Application Scenario

